



<http://www.diva-portal.org>

## Postprint

This is the accepted version of a paper published in *Philosophical Transactions. Series A: Mathematical, physical, and engineering science*. This paper has been peer-reviewed but does not include the final publisher proof-corrections or journal pagination.

Citation for the original published paper (version of record):

Höök, M., Fantazzini, D., Angelantoni, A., Snowden, S. (2014)

Hydrocarbon liquefaction: viability as a peak oil mitigation strategy.

*Philosophical Transactions. Series A: Mathematical, physical, and engineering science*, 372(2006)

<http://dx.doi.org/10.1098/rsta.2012.0319>

Access to the published version may require subscription.

N.B. When citing this work, cite the original published paper.

Permanent link to this version:

<http://urn.kb.se/resolve?urn=urn:nbn:se:uu:diva-211949>

# Hydrocarbon liquefaction: viability as a peak oil mitigation strategy

Mikael Höök<sup>1</sup>, Dean Fantazzini<sup>234</sup>, André Angelantonì<sup>5</sup>, Simon Snowden<sup>6</sup>

Contact e-mail: [Mikael.Hook@geo.uu.se](mailto:Mikael.Hook@geo.uu.se)

- 1 Global Energy Systems, Department of Earth Sciences, Uppsala University, Villavägen 16, 752 36 Uppsala, Sweden, Telephone: +46 18-4713777, Fax: +46 184713513, web: <http://www.geo.uu.se>
- 2 Moscow School of Economics, Moscow State University, Moscow, Russia, [www.mse-msu.ru](http://www.mse-msu.ru)
- 3 Faculty of Economics, Higher School of Economics, Moscow, Russia
- 4 The International College of Economics and Finance, Higher School of Economics, Moscow, Russia
- 5 Post Peak Living, San Francisco, USA, <http://www.PostPeakLiving.com>
- 6 Management School, University of Liverpool, United Kingdom

## Abstract

Current world capacity of hydrocarbon liquefaction is around 400,000 barrels per day (kb/d), providing a marginal share of the global liquid fuel supply. This study performs a broad review of technical, economic, environmental, and supply chains issues related to coal-to-liquids (CTL) and gas-to-liquids (GTL). We find three issues predominate. First, significant amounts of coal and gas would be required to obtain anything more than a marginal production of liquids. Second, the economics of CTL plants are clearly prohibitive, but are better for GTL. Nevertheless, large scale GTL plants still require very high upfront costs, and for three real world GTL plants out of four, the final cost has been so far approximately three times that initially budgeted. Small scale GTL holds potential for associated gas. Third, CTL and GTL both incur significant environmental impacts, ranging from increased greenhouse gas emissions (in the case of CTL) to water contamination. Environmental concerns may significantly affect growth of these projects until adequate solutions are found.

**Key words:** hydrocarbon liquefaction, gas-to-liquids, CTL, GTL, coal-to-liquids, peak oil

## Nomenclature.

ATR	Auto-Thermal Reformer
b, b/d, \$/b	barrel $\approx$ 159 litre, barrel per day, dollar per barrel
BTL	Biomass-to-Liquids
CAPEX	Capital expenditures
CBTL	Coal / Biomass to Liquids
CBTL1	coal + biomass to FTL fuels (diesel/jet, gasoline) + electricity ( $\sim$ 12% of input feedstock is biomass - HHV basis), [from Liu <i>et al</i> 2011].
CBTL2-OT-CCS	It is a plant designed with the same FTL output capacity as CTL-OT-CCS (36,655 barrels per day) but with some of the coal input replaced by 1 million dry tonnes of switch grass per year [from Kreutz <i>et al.</i> 2008].
CCS	CO <sub>2</sub> capture and storage
CCS-A	Capturing only the pre-combustion (Selexol-based) CO <sub>2</sub> from the gasification and FT units (99% capture), but not the CO <sub>2</sub> from the gas turbine exhaust gases [from Mantripragada and Rubin 2011]
CCS-B	Capturing both pre-combustion (Selexol) and post-combustion (MEA, 90% capture) CO <sub>2</sub> . In this case, exhaust CO <sub>2</sub> from the gas turbine is captured - using an amine-based (MEA) chemical absorption process [from Mantripragada and Rubin 2011]
CTL	Coal-to-Liquids
FT	Fischer-Tropsch
GTL	Gas to Liquids
IGCC	Integrated gasification combined cycle
IRR	Internal rate of return
LNG	Liquefied Natural Gas
MPGs	Mixed Prairie Grasses
MCF	1,000 cubic feet
NPV	Net Present Value
-OT	FTL synthesis systems that pass syngas only once through (OT) synthesis reactor and use unconverted syngas to make coproduct power in a combined cycle power plant [from Kreutz <i>et al.</i> 2008 and Liu <i>et al</i> 2011].
-OTA	OT system to which an autothermal reformer and extra CO <sub>2</sub> capture equipment are added downstream of synthesis to increase the fraction of feedstock C not in FTL products that is captured/stored as CO <sub>2</sub> [from Kreutz <i>et al.</i> 2008 and Liu <i>et al</i> 2011]
-OTS	OT plant design that uses biomass grown on carbon-depleted soils, leading to substantial buildup/storage of carbon in soil and roots, complementing underground storage of CO <sub>2</sub> captured at the conversion facility CO <sub>2</sub> [from Kreutz <i>et al.</i> 2008 and Liu <i>et al.</i> 2011].
-OTAS	OTA plant design that uses biomass grown on carbon-depleted soils, leading to substantial buildup/storage of carbon in soil and roots, complementing underground storage of CO <sub>2</sub> captured at the conversion facility [from Kreutz <i>et al.</i> 2008 and Liu <i>et al.</i> 2011].
ROI	Return On Investment
ROR	Rate of Return
-RC	FTL synthesis systems that recycle (RC) unconverted syngas to maximize FTL production
-S	Biomass is mixed prairie grasses grown on C-depleted soils providing substantial soil/root C build-up over the life of the FTL production facility as a biomass carbon storage mechanism complementing underground storage of supercritical photosynthetic CO <sub>2</sub> [from Kreutz <i>et al.</i> 2008].
-V	CO <sub>2</sub> is vented

# 1. Introduction

Oil is the largest contributor to mankind's energy needs and provides over 90% of all transportation energy (IPCC, 2007). Each year, new production must be brought on-stream to offset declining output from current production. More than two thirds of current crude oil production may need replacement by 2030 simply to meet current demand. This is likely to prove extremely challenging, and there is a significant risk of a peak of conventional oil production before 2020 (UKERC, 2009).

Peaking global oil production would imply a peak in oil-sourced liquid fuels. This could potentially severely impact the world economy (Fantazzini *et al.*, 2011), especially if alternative sources of energy and liquid fuels are unable to “*fill the gap*” between climbing demand and falling production on the timescale required. Coal-to-liquids (CTL) is often proposed as a possible mitigation strategy and has been an important component in several peak oil mitigation outlooks (SRES, 2000; Hirsch *et al.*, 2005; Hirsch, 2008; IEA, 2011).

A frequently cited example with coal-based synthetic fuels is the German military during the Second World War. It produced 90% of its jet fuel and 50% of its diesel through CTL (US DOE, 2009; Sasol, 2005). South Africa developed CTL in 1960s and this has remained an important part of their liquid fuel supply ever since. Demonstration and pilot plants have shown the technical feasibility of CTL as a provider of liquid fuels at smaller scales worldwide. Proponents of CTL claim that it will be capable of full or partial mitigation of the expected shortfall of conventional oil due to a global oil peak.

Similarly, liquefaction of natural methane gas (gas-to-liquids, or GTL) has emerged as a promising option to monetize stranded gas assets (Fleisch *et al.*, 2002; Wood *et al.*, 2012). Several established processes have been commercially proven in various projects and could be used as substitutes for petroleum-derived fuels, for example, shale gas could potentially mitigate part of the expected liquid fuel shortage which would arise from peak oil.

At present, world production of conventional oil stands at around 85 million barrels/day (Mb/d) and has been roughly constant since mid-2004 (Fantazzini *et al.*, 2011). Current world CTL and GTL capacity is around 400 kb/d. Existing estimates place the global decline in existing oil production rates at between 3 and 8% annually, or in other words, new capacity of 3–7 Mb/d is required every year (Höök *et al.*, 2009). Various observers advocate hydrocarbon liquefaction to provide everything from a minor role to production levels of several Mb/d. What expectations are reasonable? To assess this question, this paper reviews the technology, economics, environmental impact and supply chain of CTL and GTL.

## 2. Hydrocarbon liquefaction

This section performs a brief overview of the underlying chemistry and the main technology options from the pioneering efforts of German chemists in the early 20<sup>th</sup> century.

### 2.1 Underlying chemistry


Coal is a complex compound consisting of carbon, hydrogen, oxygen, sulphur, and minor proportions of other elements. It is an aggregate of microscopically distinguishable, physically distinct and chemically different subparts baked together. CTL works by breaking up the solid hydrocarbon structures found in coal. This may be accomplished by partial breakdown directly to liquid hydrocarbons (direct coal liquefaction or DCL) or by full breakdown into hydrogen and carbon that can be reassembled into H-C-chains of a desired

length (indirect coal liquefaction or ICL). The chemical reactions involved in reality are significantly more complex than the simple overview presented here.

The Bergius process is the foundation for DCL. It splits coal into shorter hydrocarbons, resembling ordinary crude oil, through reaction with hydrogen under high pressure and temperature (Reaction 1).




Alternatively, it is also possible to assemble short and gaseous hydrocarbon chains into liquids for both natural gas (i.e. GTL) and via indirect coal liquefaction (i.e. ICL) featuring the Fischer-Tropsch (FT) process displayed in Reaction 2.



Carbon monoxide can be produced by gasification of coal or any other carbon-rich compound. The necessary reaction energy is applied by adding oxygen or steam under high temperatures in a controlled manner to avoid full oxidation into carbon dioxide (Reaction 3).



This mixture of CO and H<sub>2</sub> is usually called a synthesis gas (or syngas) and is used to construct hydrocarbon chains of different lengths using condensation reactions with a suitable catalyst. More specifically, the FT-process yields two products, described by two different reactions (Reaction 4).



The CTL processes are influenced significantly by the properties of the coal feedstock (ash content, grindability, sulphur content, plasticity, caking properties, etc.). GTL displays fewer issues in this respect since natural gas is a more homogenous feedstock. Process efficiency and yield are further influenced by the choice of catalyst (Bacaud *et al.*, 1994; Longwell *et al.*, 1995; Duvenhage and Coville, 2006; Yang *et al.*, 2006; Khodarov *et al.*, 2007). Only four group VIII-metals (Fe, Co, Ni, and Ru) have sufficiently high activities for hydrogenation of CO to merit their use as effective FT catalysts (Tavakoli *et al.*, 2008). A more detailed discussion of FT-synthesis via ICL-technology can be found in Bridgwater *et al.* (1994), Dry (2002) and de Klerk (2009).

## 2.2 CTL technology options

CTL technology, using coal or coal plus biomass feedstock, has improved significantly since the Second World War, however, only a small number of commercial enterprises have been undertaken. Indirect liquefaction using FT-synthesis has dominated the market but the first commercial DCL facility commenced operations a few years ago.

### 2.2.1 Pyrolysis

In a pyrolysis process, heat decomposes the coal expelling volatile compounds, leading to increased carbon content in the remaining solid, leaving products such as char, semi-coke and

coke. Pyrolysis' primary use is to upgrade low-ranking coals by increasing their calorific value and reducing sulphur content and other pollutants. A demonstration plant for upgrading coal was built in the USA operating between 1992 and 1997 (WCI, 2006). The resulting tar-like liquids were mostly a by-product and reached a maximum yield of 20% (Ekinci, 2002; WCI, 2006). However, integration of reforming of methane by CO<sub>2</sub> and coal pyrolysis has improved tar yields up to 32% (Wang *et al.*, 2011). Coal tar requires further refinement before it is usable in engines. The efficiency and liquid yields of pyrolysis processes are inherently low and it appears implausible that this technique will be able to generate significant amounts of liquid fuels.

### 2.2.2 Direct coal liquefaction (DCL)

The Bergius process (Reaction 1) forms the chemical basis of DCL. Thermal energy is used to induce homolytic bond scissions in coal molecules to produce free radicals that can subsequently isomerise, decompose or be used in other chemical reactions normally performed at high temperature and pressures (Huang and Schobert, 2005; de Klerk, 2009). Adding hydrogen and a suitable catalyst initiates “*hydro-cracking*” where long, solid hydrocarbon chains rupture into shorter ones that may be liquid or gaseous. Many closely-related DCL-technologies have been developed.

DCL processes are classified into two major types, single-stage and two-stage liquefaction. The single-stage concept uses a solvent to facilitate both coal extraction and hydrogen addition in a combined reactor. Only a few single-stage designs have been demonstrated, the rest being abandoned (de Klerk, 2009). The two-stage concept uses two reactors in series, where the first converts coal to a soluble form with little change in chemical composition while the second reactor adds hydrogen converting the dissolved coal into liquid products.

Some smaller DCL pilot plants and testing facilities have yielded positive results (de Klerk, 2009). In 2002, the Shenhua Group Corporation, the largest state-owned mining company in China, was tasked with designing and constructing the world's first commercial DCL plant in the Inner Mongolia Autonomous Region (Fletcher *et al.*, 2004), which has recently become operational.

The advantage of DCL is its very high liquid yield – potentially >70% of the dry weight coal (Benito *et al.*, 1994; Couch, 2008). DCL liquids are typically of higher quality (i.e. less nitrogen, sulphur, phenols, aromatics, etc.), due to hydrogen addition, than liquids obtained from pyrolysis. The DCL liquids are effectively a synthetic crude oil (syncrude) and are directly usable in power generation or in petrochemical processes. However, they require further refining before they can be used as a transport fuel. Refining can be done directly at the CTL facility or by sending the synthetic crude oil to a conventional refinery, where it can be made into gasoline- and diesel-like fuels as well as propane, butane and many other products.

### 2.2.3 Indirect coal liquefaction (ICL)

In contrast to the approach of DCL, indirect liquefaction breaks down coal into other compounds via gasification (see Reaction 3). The resulting syngas is modified to obtain the required balance of hydrogen and carbon monoxide, then cleaned, removing sulphur and other impurities capable of interfering with subsequent reactions. Finally, the syngas is reacted over a catalyst to provide the desired product using FT-reactions (Reactions 2–4).


Although ICL has been used in a number of plants since the 1940s, many of them have been small capacity demonstration or pilot plants of 5,000 b/d or less. The South African company Sasol was established in the early 1950s and their first synthetic fuels from coal were produced in 1955 (Sasol, 2002). Sasol constructed two new plants at Secunda in

the 1980s, improving their CTL capacity by 120,000 b/d. In 2000, the plants were modernized and the old fluidized bed reactors were replaced with new Sasol Advanced Synthol reactors capable of giving 150,000 b/d of products in the range of C1–C20 (automotive fuels and light olefins) as well as 14,000 TJ of methane rich gas, which is piped to the national gas distribution network (Chang, 2000). In total, Sasol has over 50 years of experience with ICL and has produced over 1.5 billion barrels of synthetic oil in that time (WCI, 2006).

## 2.3 GTL technology options

There are many ways to liquefy natural gas, and several pilot plants, trial projects and research initiatives exist. However, only two companies – Sasol and Shell – have built large-scale commercial plants (>5,000 b/d capacity). The GTL industry is essentially immature and many important patents are held by relatively few companies (Wood *et al.*, 2012). Established GTL approaches have much in common with ICL technologies, as they both work with FT-synthesis and gaseous chemistry. Both high temperature and low temperature FT synthesis can be used to provide liquid fuels.

There are commonly three main stages in a GTL facility: synthesis gas generation, FT reaction and product upgrading (Panahi *et al.*, 2012). Auto-thermal reforming is the preferred technology to generate syngas since it offers better H<sub>2</sub>/CO ratio compared to all alternatives (Iandoli and Kjelstrup, 2007). The syngas generation stage is often the most capital intensive part of a GTL plant. A schematic process chain of a GTL complex can be seen in Figure 1.

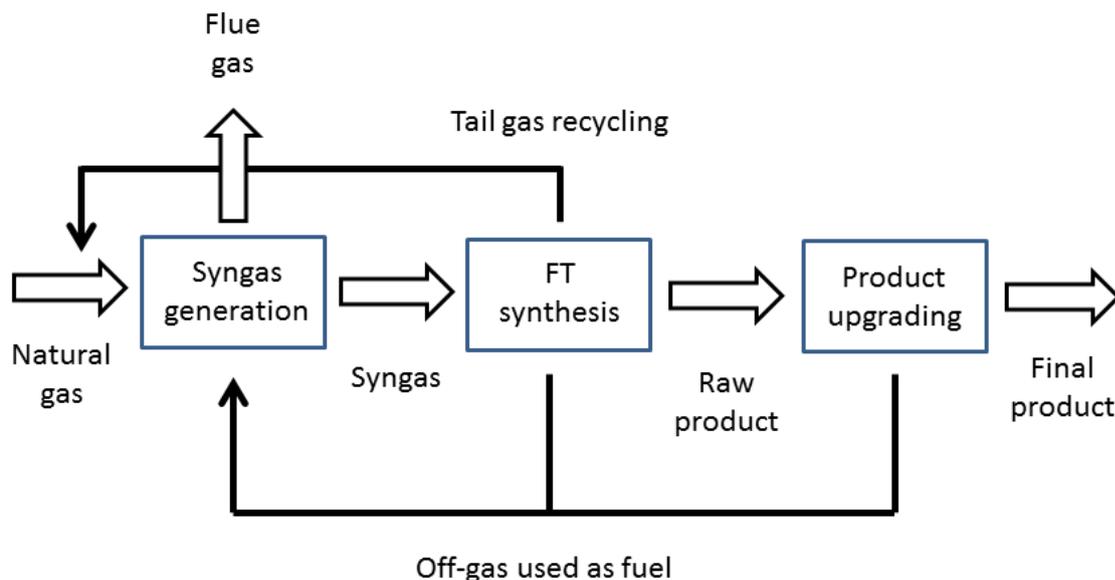

**Figure 1.** Simplified process chain for a GTL complex.

It is also possible to use GTL to provide oxygenates such as methanol or dimethyl ether (DME) (Haid and Koss, 2001). Methanol can also be converted into a high-quality gasoline through the Mobil methanol-to-gasoline (MTG) process (Yurchak, 1988). A GTL plant with 14,500 b/d capacity using the MTG process was operational from 1985 to 1997 in New Zealand before the gasoline production was permanently idled to provide only chemical grade methanol (Fleisch *et al.*, 2002).

### 2.3.1 Commercial GTL developments

Sasol developed the Sasol slurry phase distillate GTL process in the 1980s from their CTL technologies. Hot syngas is bubbled through a slurry of catalyst particles and liquid reaction products (Fleisch *et al.*, 2002). Initially iron was used as a catalyst, but recent developments have used cobalt-based catalysts providing greater conversion rates.

Developments by Sasol resulted in the construction of a stand-alone GTL plant with a capacity of 22,000 b/d in Mossel Bay in 1992. The project became known as Mossgas and is considered the first commercial GTL plant (Wood *et al.*, 2012). A subsequent collaboration between Sasol and Qatar Petroleum used auto-thermal syngas production, slurry phase FT-reactors and an isocracking product upgrading technology to develop a 32,400 b/d facility known as the Oryx plant in Qatar. The project agreement was signed in 2001 and completed in 2008 after delays and budget overruns.

Sasol later engaged in a GTL feasibility study for a Nigerian plant together with Texaco in 1998. The Escravos project was agreed in 2002 and involved Sasol, Chevron Corporation and Nigerian National Petroleum Company, using the same design as the Oryx project. Delays and cost overruns caused Sasol to withdraw in 2009, although their technologies are still used under license. The capacity of the Escravos GTL plant will be 32,400 b/d when completed in 2013 – similar to Oryx in design and size.

In 1993, a joint-venture consisting of Shell, Mitsubishi, Petronas and Sarawak State completed a GTL plant in Bintulu, with a final capacity of 14,700 b/d. Experience from Bintulu was used by Shell in the design of the world's largest GTL project, the Pearl GTL plant in Ras Laffan Industrial City, Qatar. Construction started in 2007 as a joint venture between Shell and Qatar Petroleum, and production began in 2011, reaching full capacity of 140,000 b/d in 2012.

## 2.4 System efficiencies

Thermal or energy efficiency is the percentage of the energy in the feed-stock that is converted into energy output as products. Low thermal efficiencies, often in the range of 45–55%, have been a major argument against hydrocarbon liquefaction (Liu *et al.*, 2010). DCL is commonly seen as more efficient for producing liquid fuels than ICL because only partial breakdown of the coal is required. However, such claims can be misleading because published DCL efficiencies usually refer to the formation of an unrefined syncrude requiring additional processing into useable liquid fuels. In contrast, ICL efficiencies often refer to the final products. Caution should always be exercised when dealing with efficiencies.

The estimated overall efficiency of the DCL-process is 73% (Comolli, 1999). Other groups have estimated a thermal efficiency of 50-70% (WCI, 2006; Williams and Larson, 2003; Bellman *et al.*, 2007). However, Sovacool *et al.* (2011) criticized these estimates as misleading, because industry tends to compare the heating value of the resulting liquids with that of the inputs. Hydrogen production, product refining and other steps necessary to complete the entire product supply chain are not always included in the efficiency calculations; one needs to pay attention to how those assessments have been made.

Representative efficiency for FT-synthesis used in ICL and GTL is around 50%, while the theoretical maximum has been estimated at 60–65% (van den Burgt *et al.*, 1988; Eilers *et al.*, 1990; Fleisch *et al.*, 2002; Steynberg and Nel, 2004). Tijmensen *et al.*, (2002) give overall energy efficiencies ranging from 33–50% for ICL co-using various biomass blends. Detailed studies on methanol and DME production found efficiencies of 58.3% and 55.1% (Williams and Larson, 2003), so fine-tuned ICL systems can reach high efficiencies.

In essence, there is no significant efficiency advantage for either DCL or ICL, while GTL is somewhat more efficient. As a rule-of-thumb, a 50-60% thermal efficiency can be used for hydrocarbon liquefaction in general assessments. This implies that only half of the coal energy invested in liquefaction will come out as energy available as transportation fuel.

## 2.5 Process requirements

CTL coal consumption has been assessed by many groups. Couch (2008) and Malhotra (2005) gave yields of ~3 barrels unrefined syncrude per ton bituminous coal for DCL, with a lower yield for low-ranking coals. Milici (2009) gives conversion ratios of 1.3–1.8 barrels per ton bituminous coal. The US National Petroleum Council (2007) compiled other studies and gave conversion rates of 1–2 barrels/ton of coal. Empirical estimates from published Sasol coal use gave yields of 1–1.4 barrels/ton coal (Höök and Aleklett, 2010). However, liquid yield comparisons are tricky, due to dependence on the technical system, the coal type used, system borders and many other factors. Despite differences in methodologies, all coal consumption estimates end up at approximately similar figures. As expected from the relatively low thermal efficiencies, a significant amount of coal is required to generate liquid fuels in any substantial amount. Significant CTL production is viable only in areas with abundant coal reserves. It has been estimated that large scale CTL production will be limited to about 6 countries with large coal reserves and the ability to divert significant fractions of that coal to liquefaction (Höök and Aleklett, 2010).

Obtaining reliable GTL gas consumption figures is harder. For example, the Pearl project is designed to consume 45.3 Mm<sup>3</sup> per day to yield 120,000 b/d of condensate, propane, butane, and ethane and 140,000 b/d of GTL products (Wood *et al.*, 2012). The National Petroleum Council (2007) gives an average conversion factor of 283 m<sup>3</sup> natural gas per barrel GTL product. Others have estimated the carbon efficiency, i.e. the amount of carbon in the feed gas converted to saleable products, at 53-77% (Fleisch *et al.*, 2002).

Water is a vital part of the conversion processes and CTL is highly water intensive (Mielke *et al.*, 2010). Zhang *et al.* (2009) state that each ton of synthetic oil output requires 8–9 tons of freshwater for DCL and 12–14 tons of fresh water in ICL. In contrast, the US Department of Energy found that water consumption is approximately equivalent for DCL and ICL at around 5–6 ton water/ton of oil (National Energy Technology Laboratory, 2006) and RAND calculated 6–12 ton water/ton of oil (RAND, 2008).

# 3. Environmental issues

Environmental impacts from hydrocarbon liquefaction can be broadly classified into two categories: those that accompany the extraction of the coal and gas feedstock, and apply to all uses of the feedstock, and those that are specific to the manufacture of liquid fuel.

## 3.1 Environmental impacts from CTL

When considering CTL, first we will examine impacts that apply equally to all industrial applications of coal, including landscape modification, particulate emissions and acid mine drainage. We will then examine water consumption, water contamination and greenhouse gas emissions specific to CTL.

### Landscape modification

Three types of surface mining are generally used to extract shallow coal, open-pit, strip mining and mountaintop removal. In all cases the overburden is removed to expose the coal. Open-pit mining creates a large crater-like depression. In strip-mining, as the overburden of a strip is excavated, it is placed in the excavation of the previous strip.

Mountaintop removal is applicable to horizontal coal seams in mountainous country, notably the Appalachian Mountains in the United States. At current coal prices, mountaintop removal is often the only cost-effective way to mine coal in this area. Explosives are used to remove the entire mountain top overburden and vegetation, including forests, which is placed directly in stream valleys. According to the US Environmental Protection Agency, between 1992 and 2002 surface coal mining in Appalachia damaged or destroyed more than 1900 km of streams and deforested 150,000 hectares of land, while 34,000 hectares of valleys were filled (Environmental Protection Agency, 2005).

### Particulate emissions and coal processing

Particulates are emitted both when coal is mined and via wind erosion until new vegetation covers reclaimed land. Hendryx *et al.* (2008) found that, after accounting for other variables, lung cancer mortality was higher in Appalachian counties with extensive coal mining. Coal dust contains carcinogenic compounds and metals including zinc, cadmium, nickel and arsenic. The mining and cleaning of coal at local processing sites creates large quantities of ambient particulate matter as well as contaminated water.

### Water contamination and water consumption

Water is used extensively throughout the coal mining and liquefaction process. Surface mines use water for dust abatement and all coal must be washed to remove soil and other contaminants before further processing. Water requirements often cause local aquifers to be depleted near coal mines. As rainwater drains through the mine it reacts with and oxidises pyrite ( $\text{FeS}_2$ ) in the coal, producing sulphuric acid that may leach into local aquifers in a process called acid mine drainage (AMD). AMD often continues after the mine is no longer operational. Other contaminants that may leach into the water supply from the entire mining process include cadmium, selenium, arsenic, copper, lead, mercury, ammonia, sulphur, sulphate, nitrates, nitric acid, tars, oils, fluorides, chlorides, sodium, iron and cyanide (Spath *et al.*, 1999; Palmer *et al.*, 2010).

The total amount of water required for liquefaction depends on factors like plant design, location, humidity, and coal properties. CTL is classified as a water intensive process (Mielke *et al.*, 2010), and consumption estimates range from 6–15 tons of water per ton of fuel, as noted earlier. CTL may generate or amplify water shortages in certain regions.

Cooling, boiler and process water in CTL plants needs to be of reasonable quality to prevent corrosion and/or deposit formation, and treatment is typically needed. Discharged water must be treated before it can be released to the environment without causing harm (Lei and Zhang, 2009). Rong and Victor (2011) point to water availability and water quality issues as important factors behind the recent caution toward CTL in China.

### **Greenhouse gas emissions**

The CTL process produces significant amounts of carbon dioxide, the greenhouse gas primarily driving anthropogenic global warming. From a life-cycle perspective, it is also important to include the emission contributions from mining. Coalification, the natural process by which coal is made, traps significant amounts of methane as the coal rock is formed, called coal bed methane (CBM) that is released during the mining of coal. Methane represents approximately 14% of global GHG emissions (in CO<sub>2</sub>-equivalent) and CBM accounts for approximately 8% of total methane emissions (World Coal Association, 2012).

Annual worldwide CBM release in 2000 was estimated to be 0.24 Gt CO<sub>2</sub>-equivalent. This compares with approximately 35 Gt of anthropogenic CO<sub>2</sub> released annually (IPCC 2007). Brandt and Farrell (2007) find that even a partial transition to coal-to-liquids syngas could raise upstream GHG emissions by several Gt of carbon per year by mid-century, approximately 7% of the current total carbon emissions, unless mitigation steps are taken. However, there are CTL plant configurations using CO<sub>2</sub> recycling/capture/storage that may be capable of reducing emissions significantly (Williams and Larson, 2003). Mantripragada and Rubin (2009) explore some of those configurations, but also stress that handling CO<sub>2</sub> responsibly dramatically raises CTL costs.

## **3.2 Environmental impacts from GTL**

For GTL, the natural gas can come from conventional or unconventional sources. Unconventional sources include biogas, shale or tight gas and coal-bed methane. There are current concerns over the impact of obtaining tight gas using hydraulic fracturing, also known as “*hydro-fracturing*” or “*fracking*.” Some environmental impacts are common to conventional and unconventional gas extraction, such as GHG emissions, particulate emissions and water requirements. Others are unique to conventional extraction, like gas flaring, or to unconventional extraction, including possible contamination of aquifers, wastewater disposal and seismic activity.

### **Unconventional gas production**

Worldwide there are 400 tcm (trillion cubic meters) of conventional gas and almost as much unconventional gas resource (IEA, 2011), with developed reserves standing at 208 tcm (BP, 2012). Unconventional gas production in the U.S. passed conventional gas production in 2009, and shale gas alone is expected to comprise 49% of all U.S. gas production by 2035 (EIA, 2012a).

The hydro-fracturing process involves drilling a well horizontally through shale formations that usually lie more than 1,000 meters below the ground surface. The well casing is perforated using explosives, then a mixture of water, sand and chemicals is pumped down at very high pressures, causing the shale to fracture and release the trapped gas (see also Chew, this volume). When the well pressure is released, much of the hydro fracturing fluid and gas flow to the surface.

The reported and potential negative environmental impacts include:

- Occasional contaminated surface water from illegal dumping of used hydro fracturing fluid and accidental spills
- Occasional contaminated aquifer water (PNAS, 2011)

- Wastewater containing radioactive and other materials that sewage treatment plants are incapable of treating
- Minor induced seismicity
- Methane leakage

The International Energy Agency points out that if the environmental concerns about hydro-fracturing are not addressed by industry, the expansion of the method worldwide could be slowed or halted (IEA, 2012c). Several countries have completely banned or declared moratoria on hydro-fracturing, including France, Bulgaria, Romania, South Africa, Germany and Ireland.

### **Greenhouse gas emissions**

Gross GHG emissions from GTL are not likely to be significant in comparison to conventional oil. The IEA estimates that only 750,000 b/d will be produced by 2035, mostly by Qatar (IEA, 2010). It is possible to prevent approximately 90% of the upstream release of CO<sub>2</sub> from the GTL process through carbon capture and sequestration (Williams and Larson, 2003).

### **Water contamination**

Water contamination is primarily caused by surface water pollution from improperly disposed wastewater and spills, well leaks and (as yet unproven) underground, upward fluid migration. The industry has used over 2,500 different chemicals in the fracturing process, to control bacterial growth, inhibit corrosion, decrease pumping friction and improve proppant placement (proppant is sand-size material helping to keep fractures open) (US House, 2011). Many companies do not disclose the chemicals used, but they include benzene, lead and at least 29 other known or possible carcinogens that are regulated under the U.S. Safe Drinking Water Act or are listed as hazardous air pollutants under the U.S. Clean Air Act.

Of the 17 million litres of hydro-fracturing fluid that can be pumped into a well, up to one third is recovered (Myers 2012). Myers used computer modelling to suggest that the typically slow upward migration of the remaining water through very thick shale layers, generally thought to take tens of thousands of years, may be greatly accelerated by hydro-fracturing, and in certain scenarios this time could be reduced to less than 100 years. Where there are pre-existing geologic fractures in the rock, the upward fluid migration could occur in as little as a few decades. A U.S. Government panel called the possibility of such accelerated fluid migration “remote” (US Department of Energy, 2011). Since there are as yet no monitoring systems in place that can demonstrate this effect conclusively (Myers, 2012), computer modelling is just an initial attempt to understand and predict aquifer contamination.


### **Seismic activity**

The US National Research Council (NRC, 2012) conducted an extensive review of the literature that discusses seismic activity due to gas and oil drilling. Seismic activity has been noted since the 1920s but events are rare when compared to the total number of wells drilled. There is only one confirmed instance of seismic activity directly due to hydro fracturing wells, in the U.K., with a magnitude of 2.3 (de Pater and Baisch, 2011), and one suspected, but not confirmed, case in the U.S. (Holland, 2012) with magnitude ~2.8. Other reports of seismic activity can be attributed to the injection of wastewater into deep wells, rather than to hydro-fracturing. The estimated overall risk of seismic activity due to hydro-fracturing is currently very low.

# 4. Economic issues

The high cost of building a CTL plant is a key obstacle to the development of this energy technology. The high price of oil in the last decade, and particularly in the last five years, has completely changed the energy landscape (see Fantazzini *et al.* (2011) for a discussion) and has impacted in the financial analysis of CTL plants.

While this increase in oil price has improved the economic viability of CTL, it has also caused a large increase in the overnight costs<sup>1</sup> and Total Plant Costs (TPC) for a CTL plant, as well as raising the break even crude oil equivalent price (BEOP) of CTL products. For example, Figure 2 reports the time evolution of the Chemical Engineering Plant Cost Index (CEPCI), which is a dimensionless number used to update the capital cost required to build a chemical plant from a past date to a later time. This index is widely accepted and consists of subcomponents dealing with equipment, labour costs, buildings, engineering, supervision and other parameters affecting costs. Kreutz *et al.* (2008) provide a comparison of the CEPCI with the Marshall and Swift index, the US GDP deflator and the Handy-Whitman Total Plant-All Steam Generation Index.

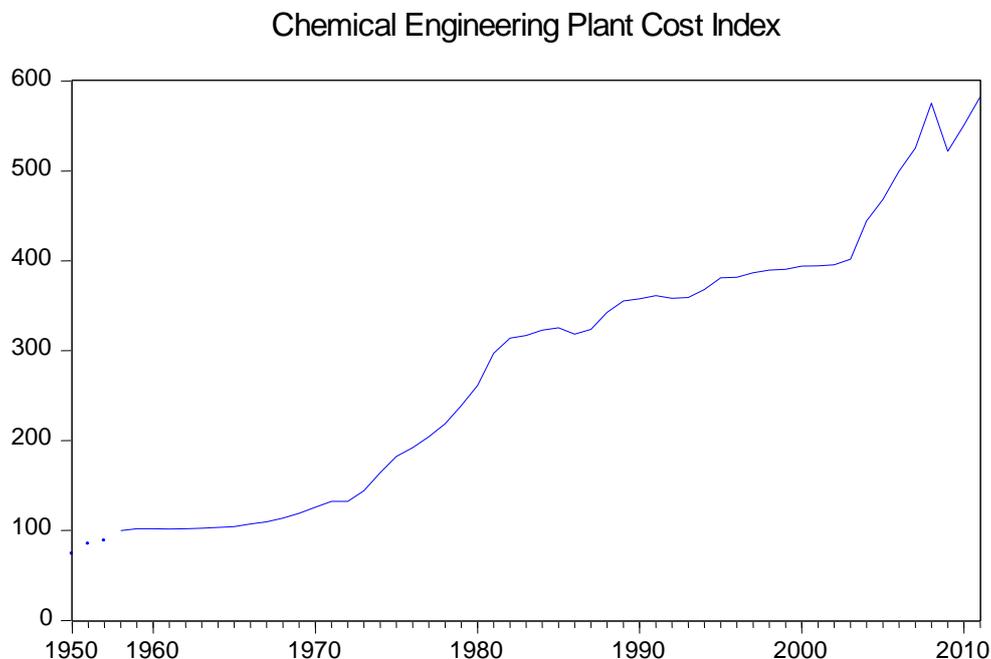

**Figure 2.** Chemical Engineering Plant Cost Index (CEPCI)

## 4.1 CTL economics

Due to cost escalation, financial analyses of CTL performed before 2005/2006 have become largely unrealistic, as shown by Höök and Aleklett (2010). Consequently, we examine here only studies from 2007 onwards.


---

<sup>1</sup> An overnight cost is the cost incurred for building a plant immediately, i.e. “overnight”. It does not include any assumptions on interest expenses that occur during the construction period.


Tables 1–3 in the Appendix report the main results in terms of economic and financial feasibility for CTL plants (the table cells are filled either using data reported in the original papers or are calculated with the data in the original papers, whenever possible): differently from the studies before 2006 (see Höök and Aleklett (2010) for a review), the works published in the last five years highlight a considerable reduction in planned CTL plant capacity. All studies examined here (except one) assumed a capacity equal to or lower than 50 kb/d, and some even analyse coal- and biomass-to-liquids (CBTL) or biomass-to-liquids (BTL) plants with a capacity as low as 5 kb/d. This is mainly due to construction cost escalation: if we consider a 50 kb/d plant, the estimated total plant cost now lies between \$3.5 billion (without CCS) and \$6.3 billion. Considering TPC per b/d capacity, the estimated costs now range from \$90,000 to over \$300,000 per b/d, with a mean value of \$145,000 per b/d. However, it is the required break-even (crude) oil equivalent price (BEOP) of synfuels that is probably the best indicator of the changed energy environment: it now ranges from \$50/b to \$200/b, with a mean close to \$85/b.

To account for inflation, the TPCs and BEOPs reported in Tables 1-3 have been raised to 2011\$ using the Chemical Engineering Plant Cost Index (CEPCI). For the sake of brevity, figures 3 and 4 show the updated TPCs and BEOPs for CTL plants (left figures) and CBTL/BTL plants (right figures), without separating them based on additional technical details (e.g. with and without CCS).

If we consider the updated costs for a 50 kb/day CTL plant, for instance, the TPCs now range from \$4.1 billion (without CCS) to \$7 billion, while the updated BEOPs range from \$50/b to \$110/b. All plants in Figure 4 with BEOPs lower than \$60/b are without CCS. Venting CO<sub>2</sub> to the atmosphere is the cheapest option, although the environmental costs of such an option are considerable. For a detailed analysis of natural resource damage costs, see Talberth (2009) and references therein.

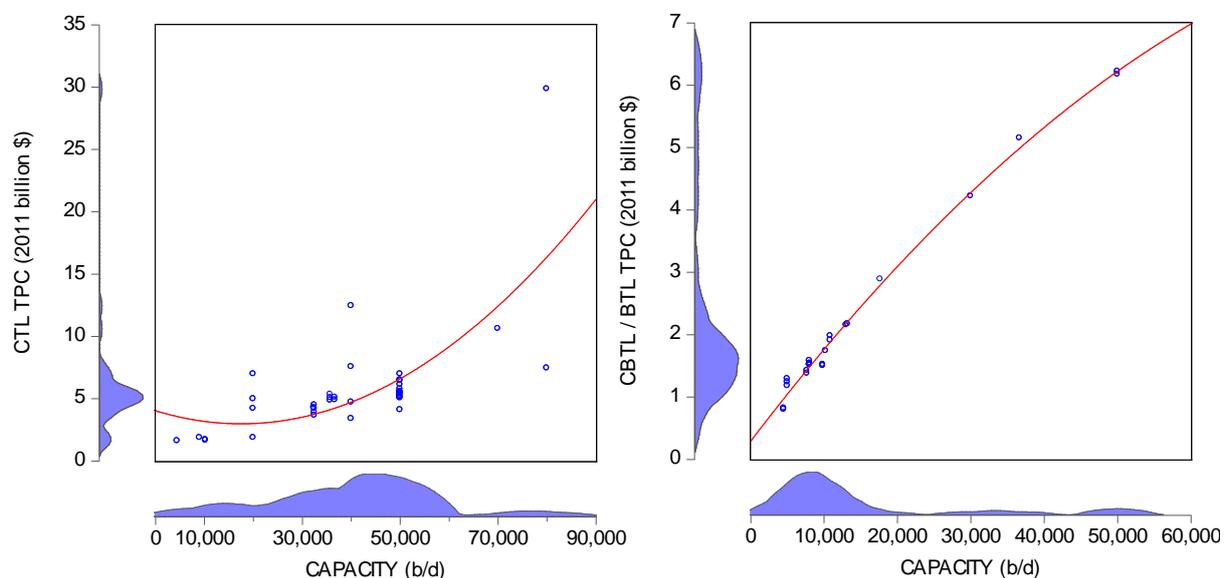

**Figure 3.** TPCs for CTL plants (left) and CBTL/BTL plants (right) expressed in 2011 billion \$, with kernel densities on the axis borders and a polynomial fit of second order.

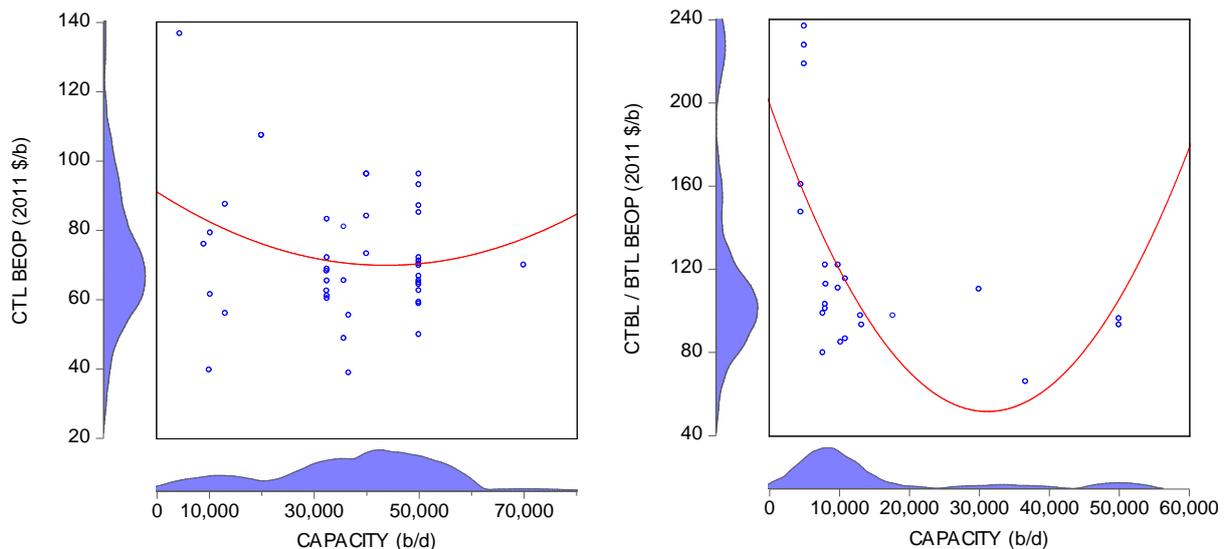

**Figure 4.** BEOPs for CTL plants (left) and CBTL/BTL plants (right) expressed in 2011 \$/b, with kernel densities on the axis borders and a polynomial fit of second order.

#### 4.1.1 Sensitivity analyses

Many papers surveyed for this work performed sensitivity analysis in which the authors changed some inputs and verified how much the estimated TPCs and synfuel Required Selling Prices (RSPs) changed as a result. We discuss below the most important results.

- Most studies used the assumption of a mature industry as a base case even though this is true only for South Africa. Clearly, any new CTL plant that could be built outside of South Africa (even with assistance from Sasol) may behave more like an early mover<sup>2</sup>. This problem was analysed by Williams *et al.* (2009), who showed that a 50 kb/d plant with CO<sub>2</sub> vented to the atmosphere (i.e. the cheapest technical configuration) in the base case for a mature industry has a TPC of \$98,000 per b/d and a BEOP of \$56/b. The case of an early mover resulted in a TPC of \$110,000 per b/d and a BEOP of \$86/b – more than a 50% increase. More complex configurations involving CCS, ATR, etc. would be even more financially constrained under early mover conditions. Similar results also hold for CBTL plants.
- The price of FT diesel is particularly sensitive to “*engineer, procure, construct*” (EPC) costs, changes in the Internal Rate of Return (IRR), capital structure, plant size, construction time, coal prices, debt amortization period, electricity price, and final availability (i.e. the capacity factor<sup>3</sup>).


<sup>2</sup> Early mover conditions are intended to better reflect the costs and risks of being first movers: a conservative training algorithm for equipment components in estimating capital costs and much higher financing cost. See Williams et al. (2009) for details.

<sup>3</sup> The capacity factor is the ratio of the actual output of a plant over a period of time and its potential output if it had operated at full nameplate capacity the entire time.

- The cost of carbon sequestration implies an increase in the price of FT liquids of between \$5/b and \$20/b (a 10–30% increase) depending on the chosen technical configuration.
- Synfuels tend to be less costly when electricity is a major co-product of a CTL plant than when the plants are designed to produce mainly liquid fuels. Moreover, it can reduce credit concerns and improve financing. However, a generous electricity selling price is required: Mantripragada and Rubin (2011) suggest \$40–\$80/MWh.
- Wu *et al.* (2011) show that the RSP of synfuel increases linearly with the mine-mouth price of coal, *when holding the other system assumptions constant*.
- Wu *et al.* (2011) also show that a 5% increase in the liquid fuel yield results approximately in a 5% decrease of the RSPs for all the mix levels of coal and biomass, and *vice versa*. The relationship between yield and RSP is approximately linear in the  $\pm 10\%$  range.

This last point raises an interesting issue: the vast majority of the papers we surveyed considered a liquid fuel yield higher than 1.4 b/ton and most assumed a yield higher than 2 b/ton (see Figure 5).

While obtaining such high yields at the laboratory level is not an issue, at the commercial level the actual situation is rather different: using data from Sasol in South Africa, which owns the world’s only commercial-scale ICL plants, Höök and Aleklett (2010) found a conversion ratio of only 1–1.4 b/ton for bituminous coal. These lower yields should not come as a surprise since sub-optimal conditions, losses, leaks and similar factors are unavoidable realities. Coal quality issues, refining and further treatment can additionally diminish yields.

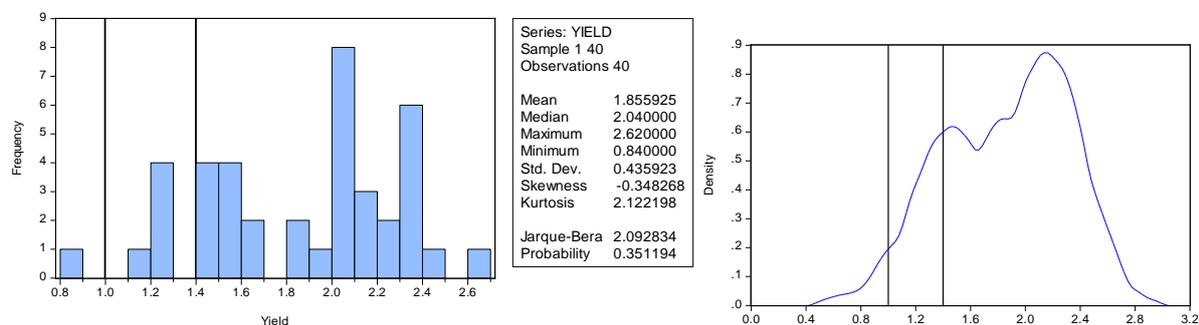


**Figure 5.** Histogram, descriptive statistics, and kernel density of the distribution of the yields across the surveyed papers. The 1–1.4 b/ton yield range by Sasol is highlighted using two black vertical lines.


Therefore, in Tables 1-3, the bituminous coal feedstock costs should be 50% higher *on average* than those reported, and 100% higher when *the theoretical yields are higher than 2 barrels/ton*. Moreover, if the approximate linear relationship between RSPs and yield ratios found by Wu *et al.* (2011) holds true also for large yield variations, this implies an *approximate increase of 30–40% on average in the final RSPs (and relative BEOPs)*, and an *approximate increase of 50% of the reported RSPs (and relative BEOPs) when the theoretical yields are higher than 2 b/ton*.

To make matters worse, the price of coal has also risen in the last decade, as Figure 6 clearly shows. Unfortunately, most of the surveyed papers considered much lower prices than those observed in this decade (Figure 7). The mean price for bituminous coal throughout the literature was close to \$42/ton, while almost two-thirds of the prices considered were lower than \$40. . Given that in 2011 the average spot price for US Central Appalachian coal was

close to \$80/ton, the purchase cost for bituminous coal feedstock reported in theoretical works should be 100% higher *on average* than what is reported. Furthermore, if we consider the difference we have noted between theoretical and empirical yields, the cost for the bituminous coal feedstock reported in theoretical works should be 200% higher on average, and 300% higher when the reported theoretical yields are higher than 2 b/ton.

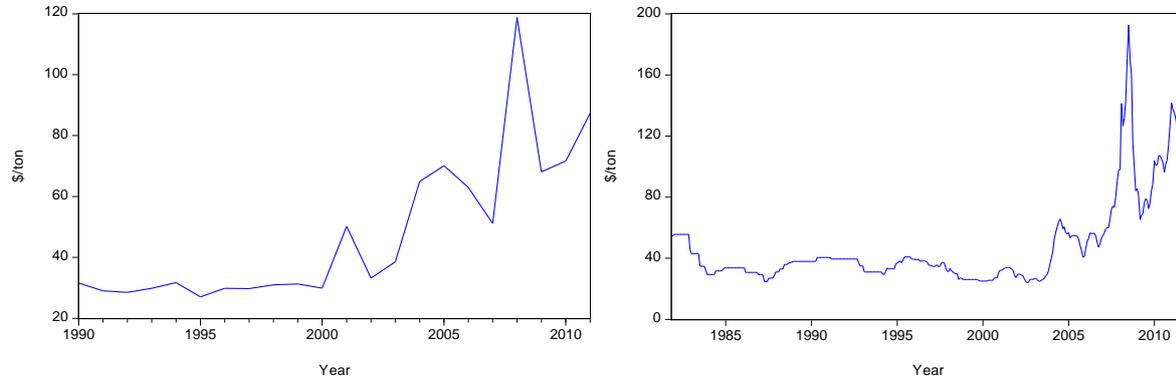

**Figure 6.** *Left:* Average yearly US Central Appalachian coal spot price, (\$/short ton), 1990-2011. Source: Platts and BP Statistical Review of World Energy. Prices are for 12,500 BTU, 1.2% SO<sub>2</sub>, FOB. *Right:* Monthly price for Australian thermal coal (\$/short ton), November 1981 to October 2011. Source: GlobalCOAL and Indexmundi. Prices are for 12,000 BTU, less than 1% sulphur, FOB. Both prices are in nominal terms.

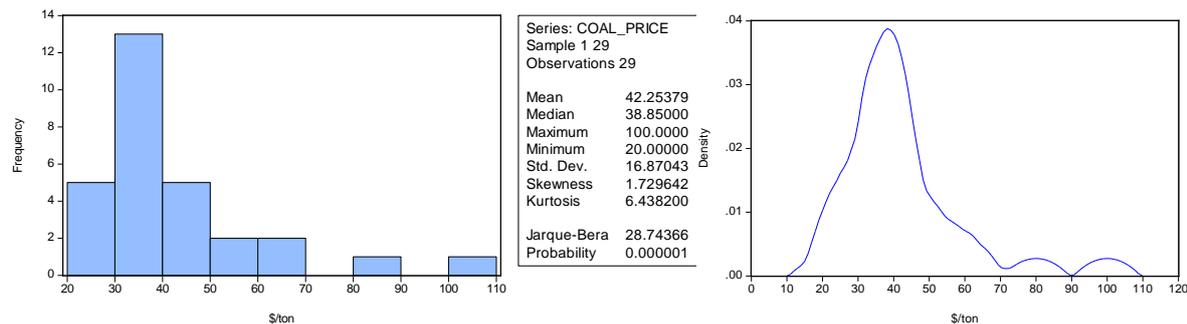

**Figure 7.** Histogram, descriptive statistics, and kernel density of the distribution of the coal prices across the surveyed papers.

Unfortunately, many of these theoretical analyses assume conditions that are optimistic at best. For example, the DOE/NETL (2009) paper, and other papers as well, assumed a construction period of 3 years, a plant availability/capacity factor of 90%, and a plant life of 30 years:

- A construction period of 4/5 years is a much more realistic estimate.
- Considering water constraints in many coal rich regions, or in general the specific local settings where potential CTL plants could be set (like Alaska), plus the fact that this is a new technology not tested at the industry-commercial level (except for South Africa), then a more conservative estimate of 80–85% availability should be considered. We note that Berg et al. (2007) showed that a decrease of 5% in the plant availability results in an increase of 8% in the RSP for synfuels.
- A long plant life is crucial to guarantee an adequate return to investors given the high initial capital investment. Therefore, it is important to verify whether the local coal reserves will be sufficient to sustain the projected demand for 30 years, a condition not always likely to be met.


Finally, CTL requires large amounts of water, as previously discussed in section 2, and waste water treatment and discharge systems are required, which increase plant costs. In summary, our analysis highlights a strong risk for CTL plants to become financial black holes, and helps explain why China has strongly slowed down the development of its CTL program (Rong and Victor, 2011).

## 4.2 GTL economics

Unlike CTL plants, the construction and operation of large scale GTL plants is now a reality, with increasing momentum. After the experiences of Sasol's Mossgas GTL plant in South Africa and Shell's Bintulu plant in Malaysia the first decade of the 21<sup>st</sup> century has witnessed the construction and start of the Oryx 34,000 b/d GTL plant and the Pearl 140,000 b/d plant, both in Qatar. Moreover, a 34,000 b/d GTL plant is being built in the Escravos region in Nigeria and is expected to become fully operational in 2013.


This difference in outcome between CTL and GTL plants is mainly explained by the price differential between oil (close to \$100/b or higher values from 2008 onwards) and natural gas (currently in the range \$2-\$3/MM Btu [ $\approx 0.18$  barrel oil] in the US, thanks to the influx of shale gas), moreover, for large gas producers like Qatar, the effective cost of the gas feedstock is zero (Pearl GTL plant) or close to zero (Oryx GTL plant). Despite the high upfront costs of building a GTL plant, the price differences between the gas feedstock costs and the premium liquid product justifies the building of a GTL plant.

Tables 4–7 in the Appendix report the main results of recent studies in terms of economic and financial feasibility of GTL plants (the table cells are filled either using data reported in the original papers, or are calculated with the data in the original papers, whenever possible). However, we warn the reader to take care with the GTL results more than the previous CTL ones. Most of the work on GTL is not peer-reviewed and in some cases costs were not adjusted for inflation. We can now consider the real costs of three GTL plants, shown in Table 8. In the same table, we also report the indicative economics of small scale GTL plants. To have a clearer and more correct picture of all estimates, we increased the previous TPCs and BEOPs reported in Tables 4-7 to 2011\$ using the Chemical Engineering Plant Cost Index and show them in Figure 8:

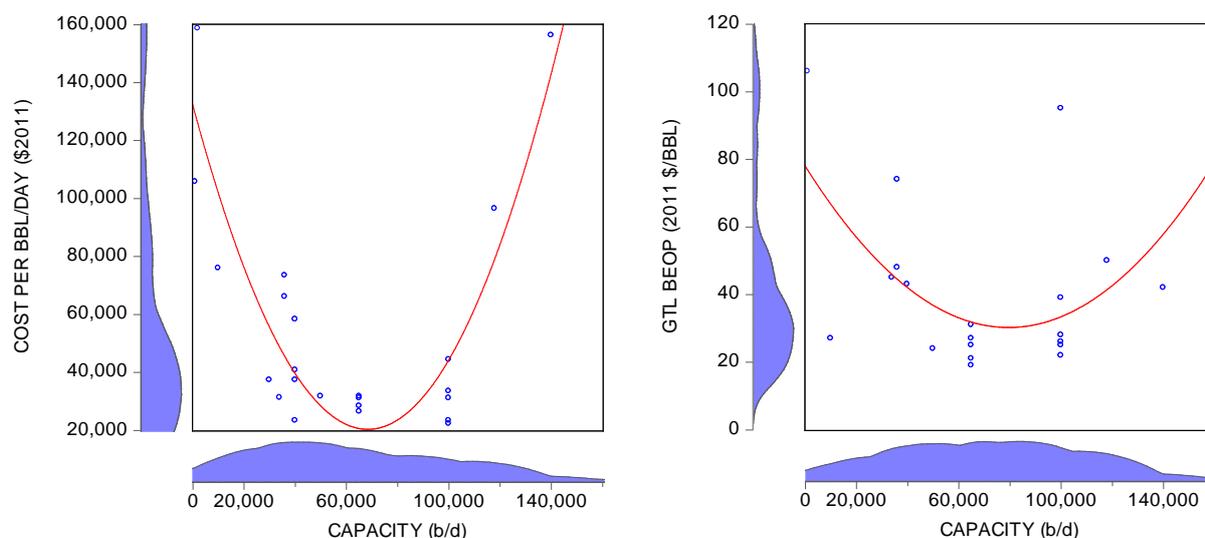

**Figure 8.** Costs per b/d for GTL plants (left) and BEOPs for GTL plants (right), expressed in 2011 \$, with kernel densities on the axis borders and a polynomial fit of second order.

The updated figures reveal that most of the studies expect (in \$2011) a unit cost for GTL plants ranging mostly between \$20,000 and \$40,000 b/d, while almost all studies expect a BEOP below \$60. But how do these cost estimates compare with the real costs observed with the three GTL plants built (or being built) in recent years? We show in Figure 9 the unit costs for the Pearl, Oryx and Escravos GTL plants and compare them with the theoretical unit costs retrieved from the studies dealing with GTL, as well as with the theoretical unit costs retrieved from studies dealing with CTL: the latter are shown for sake of interest, given that the engineering and the cost structure for CTL and GTL plants are similar.

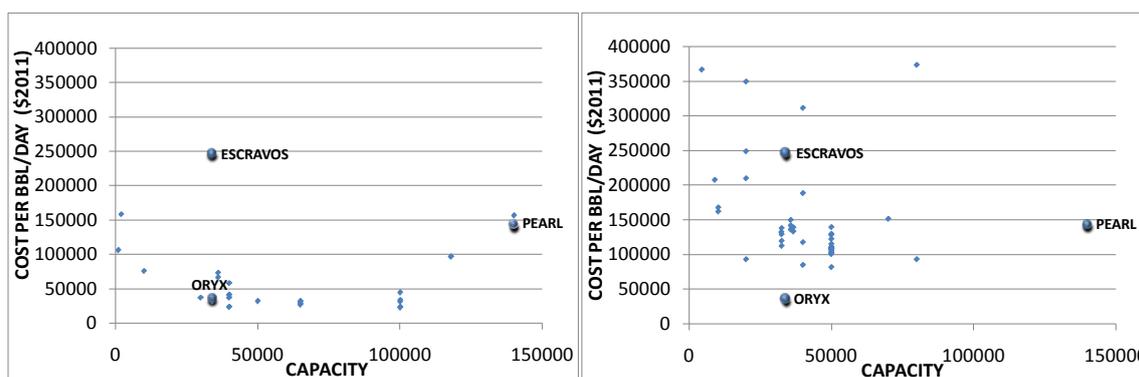

**Figure 9.** Theoretical unit costs per b/d for GTL plants (left) and theoretical unit costs per b/d for CTL plants (right). The real unit costs for Escravos (latest), Oryx and Pearl are highlighted in both plots.

**Escravos:** the real cost is a complete outlier in case of the theoretical studies dealing with GTL plants, whereas it is in the middle of the cloud of estimates for CTL plants;

**Oryx:** the real cost is in line with what was expected in GTL theoretical studies, while it was too cheap for theoretical CTL studies. Interestingly, on August 4, 2011, during an official presentation in Canada, Sasol "...indicated that were Oryx to be built today, the cost would be closer to \$2 billion to \$2.5 billion, or about \$65,000 per barrel" (New Technology Magazine, 2011);

**Pearl:** this plant represents an outlier for both types of studies but for different reasons. In CTL studies, the unit cost for this plant is very close to the mean estimate but a plant of this size was not considered due its large capacity (140,000 b/d) and extremely high cost. In GTL studies, the real cost is much higher than what was expected except for the work of Velasco *et al.* (2010), who used the data reported in Rahmim (2008) exactly referring to the Pearl plant.

Unfortunately, cost escalation often occurs: apart from the Oryx plant, *the final total cost has so far been approximately three times that initially budgeted*. In the case of the World GTL plant in Trinidad and Tobago, the original CAPEX was expected to be 0.125 billion\$, while the last estimate is roughly 0.400 billion \$ (Ramdass, 2010). The unit cost is approximately \$178,000 b/d, in between the Pearl and the Escravos plants — and more than 3 times the original estimate.

Finally, we make a couple of comments on the small scale GTL technologies, recently proposed by CompactGTL and Velocys (a subsidiary of Oxford Catalyst Group). Their size allows them to be installed on ship decks and in small offshore plants. Although the unit cost seems to be in the same order of magnitude of the large scale plants, their small size requires much smaller upfront costs and allows cost escalation to be more easily controlled. This new technology can be of particular interest for associated/flare/stranded gas, usually associated

with oil deposits and flared into the atmosphere, particularly in Russia (see Oil and Gas Eurasia 2009), where traditional large scale GTL plants are not economically viable.

## 4.3 Financing

The vast majority of studies examined assumed that CTL/CBTL/GTL plants are financed by using both equity and debt: more specifically, the assumed equity proportion ranges from 30% to 50%, even though some papers also consider the case of a 100% equity financed project.

The assumed return on equity ranges from 12% to 20%, but some analyses that considered early mover conditions or more realistic scenarios deliver a return as low as 5%. Interestingly, these latter works (i.e. see Talberth (2009) and Hatch (2008)) are also among the few that performed rigorous Net Present Value (NPV) analyses, negative in both cases. Instead, DOE/NETL (2009) showed that for most of its assumed CTL and CBTL plants the NPV is positive, even though the conditions assumed are optimistic at best (they showed a negative NPV for BTL plants). The cost of debt is usually assumed to be 8–9%, while lower interest rates are possible only in the case of government loan guarantees. Almost all papers admit that financing CTL projects can be difficult unless public incentives and subsidies are provided.

Berg *et al.* (2007) examined a large set of public incentives, including loan guarantees, investment tax credits, and excise tax credits, tax exemptions for debt, purchase agreements and grants. Except for purchase agreements, they showed that the total cost for the taxpayer would range from \$87 million to \$1.5 billion in the case of a 30 kb/day plant. While purchase agreements are favoured by many industry experts because they ensure a minimum cash flow (thus managing oil price volatility), they can be extremely expensive and cost more than the total cost of a CTL plant. Furthermore, according to Berg *et al.* (2007), loan guarantees can provide greater benefits than tax incentives, which leads to a lower liquid fuel price with a very low public budget impact.

Unfortunately, Bartis *et al.* (2008) and Camm *et al.* (2008) highlighted that loan guarantees require a lot of caution: while a loan guarantee is of no use without default risk, the higher the default risk the more a loan guarantee will reduce the interest rate paid on debts because it imposes a larger cost on the government offering the default protection. In the presence of a loan guarantee, the investor wants to increase the project debt share because of the government's willingness to bear a portion of the default risk: however, this means that the government increases the probability of default. In this regard, Bartis *et al.* (2008) and Camm *et al.* (2008) found that:

- Except at very low expected petroleum prices, if the investor holds its debt share constant, a loan guarantee has only small effects on real after-tax internal rate of return flows.
- How much a loan guarantee costs the government depends fundamentally on how much responsibility the government takes to oversee the project to limit the potential for moral hazard.
- The power of any loan guarantee to promote early CTL investment ultimately lies in how much default risk the government is willing to accept.

Finally, we remark that all the studies we surveyed emphasize the need to combine public incentives to deal with specific project risks and improve the project's long-term competitiveness. Berg *et al.* (2007) found that grants, loan guarantees, excise tax credits may be the most cost effective incentives.

## 4.4 Supply chain issues

Supply chain risks, vulnerabilities and uncertainties (Simangunsong *et al.*, 2012) are another important topic for energy strategies involving major hydrocarbon liquefaction undertakings. High oil prices or oil shortages that make CTL more attractive may also bring about problems for parts of the liquefaction supply chain. Business risks have been broadly reviewed by Oke and Gopalakrishnan (2009). For a CTL/GTL supply chain, we have identified three major risk categories.

In a joint report, Lloyd's of London and Chatham House have advised all businesses to begin scenario-planning exercises for the oil price spike they assert is coming in the medium term (Lloyd's, 2010). It will prove imperative that business addresses this Schumpeterian shock in a timely fashion (Barney, 1991).

### Material flow risks

Material flows involve physical movements within and between supply chain elements, such as coal transportation, movement of spare parts for CTL/GTL facilities and delivering CTL/GTL products to consumers. These concerns, and issues such as capacity change over time relate to typical supply chain design problems (Carle *et al.*, 2012; Singh *et al.*, 2012) complicated by many of the risks discussed above that are specific to the chemical industry (Floudas *et al.*, 2012; Liu *et al.*, 2011).

Today, petroleum products supply 95% of all energy used in global transportation (IPCC, 2007). Oil price volatility or supply disruptions may have a major impact on transportation and this may completely change the competitiveness of CTL facilities located at a distance from coal mines. For the USA, coal accounts for 44% of the railroad tonnage (McCullum and Ogden, 2009), while the corresponding figure for China is more than 50% (Rong and Victor, 2011). Rail capacity issues and bottlenecks have been a persistent problem in several cases and future rail policies can have significant impact on CTL supply chains. The only exception is CTL facilities at mine-mouth locations. It should also be noted here that CTL/GTL may also impact existing hydrocarbon supply chains negatively and these concerns have led to the abandonment of certain projects (Rong and Victor, 2011).

### Financial flow risks

Inability to settle payments, improper investments, exchange rate uncertainties and financial strength of supply chain partners and their financial handling/practices can also give rise to risks. In a globalized economy, the exchange rate has a significant influence on a company's profit after tax, supplier selection, market development and other operation decisions. A financially weak supply chain partner can bring down the entire chain unless alternatives can be found. Additional financial issues were discussed in section 4.2

### Information flow risks

Supply chains are also influenced by information flows such as demand, inventory status, order fulfilments, design changes and capacity updates. Some observers even perceive information as a bonding agent between material and financial flows. Information system security and disruptions could arise from internally ill-managed systems or potentially by outside sources such as industrial espionage, hackers or similar (Faisal *et al.*, 2007).

## 5. Concluding discussions

The technology behind CTL is both proven and flexible, especially for ICL, with DCL and ICL systems have comparable system efficiencies. However, it is vital to look at the entire

system and also integrate factors outside the CTL plant into the analysis. Höök and Aleklett (2010) earlier concluded that ICL seems to be the more likely option for a CTL development based on higher flexibility, better environmental capabilities and stronger supporting experience and infrastructure. If this is coupled with the development of FT-based GTL projects, additional synergy for hydrocarbon liquefaction may arise.

We also note that coal production requirement is a major factor in CTL feasibility. Significant CTL production requires equally significant coal production and resources that only a few countries or regions realistically can develop. CTL capacities in the Mb/d-range will effectively be limited to the largest coal producing countries in the world: China, USA, India, Russia, Australia and South Africa. Even if several Mb/d could be derived from CTL, this would account for only a minor share of global oil production and barely offset the decline in existing oil production (Höök and Aleklett, 2010).

Furthermore, environmental impacts of large scale development of CTL must be considered. Political complications of developing such a CO<sub>2</sub>-intensive technology could become an obstacle in countries where anthropogenic climate change is seen as an important question. Although CCS and low emission configurations are available, required coal mining increases can be seen as a significant environmental impact. Obtaining public acceptance, and later political acceptance, for CTL might be problematic. Furthermore, water use is commonly overlooked even though CTL is a water-intensive undertaking. In fact, water issues were identified as one of the most important factors behind the Chinese policy reversal (Rong and Victor, 2011).

A review of recently published studies shows that coal costs were often underestimated. Liquid yield was assumed to be significantly higher than seen in the only available commercial example (i.e. Sasol). We also note that almost all papers admit that financing CTL projects can be difficult unless public incentives and subsidies are provided. To conclude, our analysis highlights a strong risk for CTL plants to become financial black holes, and helps explain why China has slowed the development of its CTL program, as discussed in detail by Rong and Victor (2011).

GTL faces similar problems and risks. Those include high capital costs, technical efficiency and reliability issues, oil price volatility, uncertainty of petroleum product markets, project financing: in this regard, for three real GTL plants out of four, the final cost has been so far approximately three times initial budget. One additional factor is access to technology, as only a small number of companies hold many important patents (Wood *et al.*, 2012). However, GTL faces a better situation compared to CTL, due to cheaper inputs and lower water requirements. Moreover, small scale GTL units recently commercialized require much smaller upfront costs and have the potential to be a solution to the problem of stranded gas, usually associated with oil deposits.

Finally, both CTL and GTL incur significant environmental impacts, ranging from increased greenhouse gas emissions (in the case of CTL) to water contamination (in the case of obtaining unconventional gas for GTL). These environmental concerns may significantly slow or even stop growth of these projects until adequate solutions are found.

## Acknowledgements

We would like to thank Dr Albert Wesker for providing valuable inspiration. This study has been supported by the STandUP for energy collaboration initiative.

# References

- Aasberg-Petersen, K., Christiansen, T.S., Stub Nielsen, Dybkjær, I., 2003. Recent developments in auto-thermal reforming and pre-reforming for synthesis gas production in GTL applications. *Fuel Processing Technology*, 83(1–3), 253–261. DOI: [http://dx.doi.org/10.1016/S0378-3820\(03\)00073-0](http://dx.doi.org/10.1016/S0378-3820(03)00073-0)
- Adedeji, O. 2008. *Natural Gas and the Economics of GTL with some Comparisons to LNG*, The University of Texas at Austin, May 2008
- Al-Shalchi, Wisam 2006. *Gas to Liquids Technology (GTL)*, Baghdad. Available from: [http://178.89.159.60/docs/Gasifiers/Gas\\_To\\_Liquids\\_Technology\\_2006.pdf](http://178.89.159.60/docs/Gasifiers/Gas_To_Liquids_Technology_2006.pdf)
- Ang, L., Baig, Y., Kanu, E., and Pwaga, S., 2010. *Natural Gas As Transportation Fuel: Conversion To Liquid Fuel And Direct Utilization*, Department Of Petroleum Engineering And Applied Geophysics, Norwegian University of Science and Technology. Available from <http://iptbml1.ipt.ntnu.no/~jsg/undervisning/naturgass/oppgaver/Oppgaver2010/10Ang.pdf>
- Bacaud, R., Jamond, M., Diack, M., Gruber, R. 1994. Development and evaluation of iron based catalysts for the hydroliquefaction of coal. *International Journal of Energy Research*, 18(2):167–176. DOI: <http://dx.doi.org/10.1002/er.4440180214>
- Bakkerud, P.K., 2005. Update on synthesis gas production for GTL. *Catalysis Today*, 106(1–4), 30–33. DOI: <http://dx.doi.org/10.1016/j.cattod.2005.07.147>
- Balogun, O. and Onyekonwu M. 2009 *Economic Viability of Gas-to-Liquids in Nigeria*, Paper presented at the Nigeria Annual International Conference and Exhibition, 3-5 August 2009, Abuja, Nigeria. Available from <http://www.onepetro.org/mslib/servlet/onepetropreview?id=SPE-128342-MS>
- Bao, B., El-Halwagi, M., Elbashir, N. 2010. Simulation, integration, and economic analysis of gas-to-liquid processes. *Fuel Processing Technology*, 91(7): 703-713. DOI: 10.1016/j.fuproc.2010.02.001
- Barney, J.B. 1991. Firm resources and sustained competitive advantage. *Journal of Management*, 17(1):99-120.
- Bartis, J., Camm, F., Ortiz, D., 2008. *Producing liquid fuels from coal: prospects and policy issues*. Report by RAND Corporation. MG-754-AF/NETL. Santa Monica, California. Available from: <http://www.rand.org/>
- Bellman, D.K., Burnes, J.E., Clemente, M.L., Katzer, J.R., Kawalkin, G.J., Muntean, G.G., Schenk, H., Strakey, J.P., Trecuzzi, C.S., 2007. *Coal to liquids and gas - topic paper #18*. National Petroleum Council. Available from: <http://www.npc.org>
- Benito, A., Cebolla, V., Fernandez, I., Martinez, M.T., Miranda, J.L., Oelert, H., Prado, I.G., 1994. Transport fuels from two-stage coal liquefaction. *International Journal of Energy Research*, 18(2): 257–265. DOI: <http://dx.doi.org/10.1002/er.4440180225>
- Berg, D., Oakley, B., Parikh, S., Paterson, A., 2007. *The business case for coal gasification with co-production – an analysis of the business risks, potential incentives, and financial prospects, with and without carbon sequestration*. Report from Scully Capital Services. Washington, D.C. Available from: [http://www.climatevision.gov/pdfs/Co-Production\\_Report.pdf](http://www.climatevision.gov/pdfs/Co-Production_Report.pdf)
- Black B. 2010 *Monetizing Stranded Gas: Economic Valuation of GTL and LNG Projects*, Master Thesis, The University of Texas at Austin, May. Available from <http://repositories.lib.utexas.edu/handle/2152/ETD-UT-2010-05-1342>
- BP, 2012. *Statistical Review of World Energy 2012*. British Petroleum. Available from: <http://www.bp.com/sectionbodycopy.do?categoryId=7500&contentId=7068481>
- Brandt, A.R., Farrell, A.E., 2007. Scraping the bottom of the barrel: greenhouse gas emission consequences of a transition to low-quality and synthetic petroleum resources. *Climatic Change*, 84(3-4): 241–263. DOI: <http://dx.doi.org/10.1007/s10584-007-9275-y>
- Bridgewater, A.V., Anders, M., 1994. Production costs of liquid fuels by indirect coal liquefaction. *International Journal of Energy Research*, 18(2): 97-108, DOI: <http://dx.doi.org/10.1002/er.4440180207>
- Bunce, P., Gould, P., 1996. *From lean to agile manufacturing*. IEE Colloquium Digest, 1996, Issue 278.
- Van der Burgt, M.J., van Leeuwen, C.J., del'Amico, J.J., Sie, S.T., 1988. The Shell Middle Distillate Synthesis process. *Studies in Surface Science and Catalysis*, 36,473–482. DOI: [http://dx.doi.org/10.1016/S0167-2991\(09\)60541-3](http://dx.doi.org/10.1016/S0167-2991(09)60541-3)
- Camm, F. Bartis, J., Bushman, C., 2008. *Federal financial incentives to induce early experience producing unconventional liquid fuels*. Report by RAND Corporation. TR-586-AF. Santa Monica, California. Available from: <http://www.rand.org/>
- Carle, M., Martel, A., Zufferey, N., 2012. The CAT metaheuristic for the solution of multi-period activity-based supply chain network design problems. *International Journal of Production Economics*, 139(2): 644–677. DOI: <http://dx.doi.org/10.1016/j.ijpe.2012.06.016>
- Castelo Branco, D., Alexandre, S., and Schaeffer, R., 2010. Co2e emissions abatement costs of reducing natural gas flaring in Brazil by investing in offshore GTL plants producing premium diesel. *Energy*, 35(1): 158-167. DOI: <http://dx.doi.org/10.1016/j.energy.2009.09.006>
- Chang, T., 2000. South African company commercializes new F-T process. *Oil & Gas Journal*, 98(2):42–45.
- Chedid, R., Kobrosly, M., and Ghajar, R. 2007. The potential of gas-to-liquid technology in the energy market: The case of Qatar. *Energy Policy*, 35(10): 4799-4811. DOI: 10.1016/j.enpol.2007.03.017.
- Chen, H., Reilly, J., Paltsev, S., 2011. The prospects for coal-to-liquid conversion: A general equilibrium analysis. *Energy Policy* 39(9):4713–4725. DOI: <http://dx.doi.org/10.1016/j.enpol.2011.06.056>
- Chijemezu, M.A. 2009 *Market potentials of Gas-to-Liquids technology and its comparison with Liquefied Natural Gas*, Seminar paper at the Department of Petroleum and Gas Engineering University of Port Harcourt (Nigeria).
- Christopher, M., Towill, D.R., 2000. *Marrying the lean and agile paradigms*. Proc. EUROMA Conference, Ghent, 2000, 114-121.
- Collot, A.G., 2006. Matching Gasification technologies to coal properties. *International Journal of Coal Geology*, 65(3-4):191–212. DOI: <http://dx.doi.org/10.1016/j.coal.2005.05.003>
- Comolli, A.G., Lee, L.K., Pradhan, V.R., Stalzer, R.H., Karolkiewicz, W.F., and Pablacio, R.M., 1999. *Direct liquefaction proof-of-concept program*. Final report prepared by Hydrocarbon Technologies Inc. (Lawrenceville, New Jersey, USA) and Kerr-McGee Corporation (Oklahoma City, Oklahoma, USA) for the Pittsburgh Energy Technology Center, US Department of Energy, DE-92148-TOP-02. Available from: <http://www.osti.gov/bridge/servlets/purl/772402-Us5qhE/webviewable/772402.pdf>
- CompactGTL. 2010. *Compact GTL as an Associated Gas Solution*, World XTL10 Summit
- CompactGTL. 2011. Information center. Available at <http://compactgtl.com/information-centre>
- Couch, G.R., 2008. *Coal to Liquids*, IEA Clean Coal Centre publication CCC/132, 2008. Available from: <http://www.coalonline.info/site/coalonline/content/browser/81994/Coal-to-liquids>
- Day, M.E., 2003. *Fischer-Tropsch Synthesis – Industrial*. In: Horvath, I.T., (Ed.) *Encyclopedia of catalysis*. Wiley, 2003, 4775 p.
- de Pater, C.J. and Baisch, S., 2011. Geomechanical Study of Bowland Shale Seismicity: [http://www.cuadrillaresources.com/wp-content/uploads/2012/02/Geomechanical-Study-of-Bowland-Shale-Seismicity\\_02-11-11.pdf](http://www.cuadrillaresources.com/wp-content/uploads/2012/02/Geomechanical-Study-of-Bowland-Shale-Seismicity_02-11-11.pdf)
- Deutsche Bank. 2010. *Special Report: Sasol Ltd - The GTL Catalyst*; Buy, Global Market Research, Deutsche Securities, November. Available from <http://www.fullermoney.com/content/2010-11-11/sasol.pdf>

- DOE/NETL, 2007.** *Baseline technical and economic assessment of a commercial scale Fischer-Tropsch liquids facility.* US Department of Energy (DOE), National Energy Technology Laboratory (NETL) joint report, DOE/NETL-2007/1260, Washington, DC. Available from: <http://www.netl.doe.gov/>
- DOE/NETL, 2009.** *Affordable, low-carbon diesel fuel from domestic coal and biomass.* US Department of Energy (DOE), National Energy Technology Laboratory (NETL) joint report DOE/NETL-2009/1349, Washington, DC. Available from: <http://www.netl.doe.gov/>
- Dry, M., 2002.** The Fischer–Tropsch process: 1950–2000. *Catalysis Today*, 71(3–4):227–241. DOI: [http://dx.doi.org/10.1016/S0920-5861\(01\)00453-9](http://dx.doi.org/10.1016/S0920-5861(01)00453-9)
- Duvenhage, D., Coville, N.J., 2006.** Deactivation of a precipitated iron Fischer–Tropsch catalyst — a pilot plant study. *Applied Catalysis A: General*, 298:211–216. DOI: <http://dx.doi.org/10.1016/j.apcata.2005.10.009>
- Economides, M., 2005.** The economics of gas to liquids compared to liquefied natural gas. *World Energy*, 8(1): 3-7, March.
- EIA, 2006.** *Annual Energy Outlook 2006 with Projections to 2030.* Energy Information Administration, February 2006. Available from: <http://www.eia.doe.gov/oiarf/archive/aeo06/index.html>
- EIA, 2012a.** *Annual Energy Outlook 2012.* Energy Information Administration, June 2012. Available from: <http://www.eia.gov/forecasts/aeo/>
- EIA, 2012b.** *Coalbed methane production.* Available from: [http://www.eia.gov/dnav/ng/ng\\_prod\\_coalbed\\_sl\\_a.htm](http://www.eia.gov/dnav/ng/ng_prod_coalbed_sl_a.htm)
- Eilers, J., Posthuma, S.A., Sie, S.T., 1990.** The Shell middle distillate synthesis process (SMDS). *Catalysis Letters*, 7:253–269. DOI: <http://dx.doi.org/10.1007/BF00764507>
- Ekinci, E. Yardim, Y., Razvigorova, M., Minkova, V., Goranova, M., Petrov, N., Budinova, T., 2002.** Characterization of liquid products from pyrolysis of subbituminous coals. *Fuel Processing Technology*, 77–78: 309-315. DOI: [http://dx.doi.org/10.1016/S0378-3820\(02\)00056-5](http://dx.doi.org/10.1016/S0378-3820(02)00056-5)
- Environmental Protection Agency, 1999.** *Methane emissions 1990 – 2020: inventories, projections, and opportunities for reductions.* Report from US Environmental Protection Agency (EPA). EPA 430-R-99-013. September 1999. Available from: <http://nepis.epa.gov/Exe/ZyPURL.cgi?Dockkey=600009LH.txt>
- Environmental Protection Agency, 2005.** *Final programmatic environmental impact statement on mountaintop mining/valley fills in Appalachia.* Report from US Environmental Protection Agency (EPA). EPA 903-R-05002, October 2005. Available from: <http://www.epa.gov/region3/mnttop/eis2005.htm>
- Epstein, P.R., Bunocore, J.J., Eckerle, K., Hendryx, M., Stout III, B.M., Heinberg, R., Clapp, R.W., May, B., Reinhart, N.L., Ahern, M.M., Doshi, S.K., Glustrom, L., 2011.** Full cost accounting for the life cycle of coal. *Annals of the New York Academy of Sciences*, 1219, 73–98. DOI: <http://dx.doi.org/10.1111/j.1749-6632.2010.05890.x>
- Erturk, M., 2011.** Economic analysis of unconventional liquid fuel sources. *Renewable and Sustainable Energy Reviews*, 15(6): 2766-2771. DOI: <http://dx.doi.org/10.1016/j.rser.2011.03.028>
- Faisal, M.N., Banwet, D.K., Shankar, R., 2007.** Information risks management in supply chains: an assessment and mitigation framework. *Journal of Enterprise Information Management*, 20(6):677–699. DOI: <http://dx.doi.org/10.1108/17410390710830727>
- Fantazzini, D., Höök, M., Angelantoni, A., 2011.** Global oil risks in the early 21st Century. *Energy Policy*, 39(12):7865–7873. DOI: <http://dx.doi.org/10.1016/j.enpol.2011.09.035>
- Fleisch, T.H., Sills, R.A., Briscoe, M.D., 2002.** 2002 - Emergence of the Gas-to-Liquids industry: a review of global GTL developments. *Journal of Natural Gas Chemistry*, 11(1–2), 1–14.
- Fletcher, J.J., Sun, Q., Bajura, R.A., Zhang, Y., Ren, X., 2004.** Coal to clean fuel – the Shenhua investment in Direct Coal Liquefaction. Presentation at the third US-China Clean Energy Conference, 18-19 October 2004, Morgantown, USA. Available from: <http://www.nrcce.wvu.edu/conferences/2004/China/>
- Floudas, C.A., Elia, J.A., Baliban, R.C., 2012.** Hybrid and single feedstock energy processes for liquid transportation fuels: a critical review. *Computers and Chemical Engineering*, 41: 24-51. DOI: <http://dx.doi.org/10.1016/j.compchemeng.2012.02.008>
- Gradassi, M.J., 2001.** Gas-to-liquids R&D: Setting cost reduction targets. In: *Studies in Surface Science and Catalysis* (ed. Iglesia, E., Spivey, J.J., Fleisch, T.H.), pp. 429-434. Elsevier.
- Haid, J., Koss, U., 2001.** Lurgi's Mega-Methanol technology opens the door for a new era in down-stream applications. *Studies in Surface Science and Catalysis*, 136, 399–404. DOI: [http://dx.doi.org/10.1016/S0167-2991\(01\)80336-0](http://dx.doi.org/10.1016/S0167-2991(01)80336-0)
- Hammami, R., Frein, Y., Hadj-Alouane, A.B., 2008.** Supply chain design in the delocalization context: relevant features and new modeling tendencies. *International Journal of Production Economics*, 113(2): 641–656. DOI: <http://dx.doi.org/10.1016/j.ijpe.2007.10.016>
- Hammami, R., Frein, Y., Hadj-Alouane, A.B., 2009.** A strategic-tactical model for the supply chain design in the delocalization context: Mathematical formulation and a case study. *International Journal of Production Economics*, 122(1): 351–365. DOI: <http://dx.doi.org/10.1016/j.ijpe.2009.06.030>
- Hatch, 2008.** *Fairbanks economic development corporation coal to liquids, FELI Study.* Report prepared by Hatch Ltd for the benefit of Fairbanks Economic Development Corporation. October 2008.
- Hendryx, M., O'Donnell, K., Horn, K., 2008.** Lung cancer mortality is elevated in coal mining areas of Appalachia. Lung cancer mortality is elevated in coal-mining areas of Appalachia. *Lung Cancer*, 62(1), 1–7. DOI: <http://dx.doi.org/10.1016/j.lungcan.2008.02.004>
- Hirsch, R.L., Bezdek, R. Wendling, R., 2005.** Peaking of world oil production: impacts, mitigation, & risk management. US Department of Energy Report. Available from: [http://www.netl.doe.gov/publications/others/pdf/Oil\\_Peaking\\_NETL.pdf](http://www.netl.doe.gov/publications/others/pdf/Oil_Peaking_NETL.pdf)
- Hirsch, R.L., 2008.** Mitigation of maximum world oil production: Shortage scenarios. *Energy Policy*, 36(2): 881–889. DOI: <http://dx.doi.org/10.1016/j.enpol.2007.11.009>
- Holland, A., 2012.** Examination of possibly induced seismicity from hydraulic fracturing in the Eola Field, Garvin County, Oklahoma (Open File Report), Oklahoma Geological Survey, August 2011.
- Hossain, I. and Gülen, G. 2007.** Lifecycle analysis of different urban transport options for Bangladesh, *Energy Policy*, 35(10): 4909-4918. DOI: 10.1016/j.enpol.2007.04.036
- Huang, L., Schobert, H.H., 2005.** Comparison of temperature conditions in direct liquefaction of selected low-rank coals. *Energy & Fuels*, 19(1):200–207. <http://dx.doi.org/10.1021/ef0301710>
- Höök, M., Hirsch R.L., Aleklett, K., 2009.** Giant oil field decline rates and their influence on world oil production. *Energy Policy*, 37(6):2262–2272. DOI: <http://dx.doi.org/10.1016/j.enpol.2009.02.020>
- Höök, M., Aleklett, K., 2010.** A review on coal to liquid fuels and its coal consumption. *International Journal of Energy Research*, 34(10):848–864. DOI: <http://dx.doi.org/10.1002/er.1596>
- IEA, 2011.** *World Energy Outlook 2011.* Available from: <http://www.iea.org>
- IEA, 2012.** *World Energy Outlook 2012.* Available from: <http://www.iea.org>
- IEA 2012c.** Golden rules for a golden age of gas. *World Energy Outlook special report on natural gas*, 2012.
- Iandoli, C.L., Kjelstrup, S., 2007.** Exergy analysis of a GTL process based on low-temperature slurry F–T reactor technology with a cobalt catalyst. *Energy & Fuels*, 21(4), 2317–2324. DOI: <http://dx.doi.org/10.1021/ef060646y>

- IPCC, 2007. *IPCC Fourth Assessment Report: mitigation of climate change*. Available from: <http://www.ipcc.ch/pdf/assessment-report/ar4/wg3/ar4-wg3-chapter5.pdf>
- Kerr, J., 2006. Streamlining the cash flow. *Supply Chain Management Review*, S25–S31.
- Khodakov, A.Y., Chu, W., Fongarland, P., 2007. Advances in the Development of Novel Cobalt Fischer–Tropsch Catalysts for Synthesis of Long-Chain Hydrocarbons and Clean Fuels. *Chemical Reviews*, 107(5), 1692–1744. DOI: <http://dx.doi.org/10.1002/chin.200733255>
- de Klerk, A., 2009. *Beyond Fischer-Tropsch: Coal-to-liquids production and refining*. Elsevier, 752 p.
- Kreutz, T., Larson, E., Liu, G., Williams, R., 2008. *Fischer-Tropsch Fuels from Coal and Biomass*, Proceedings of the 25th Annual International Pittsburgh Coal Conference, 29 September to 2 October, Pittsburgh, USA. Available from: <http://web.mit.edu/mitei/docs/reports/kreutz-fischer-tropsch.pdf>
- Krishnamurthy, R. and Yauch, C.A. 2007. Leagile manufacturing: a proposed corporate infrastructure. *International Journal of Operations & Production Management*, 27(6), 588–604. DOI: <http://dx.doi.org/10.1108/01443570710750277>
- Larson, E.D., Fiorese, G., Liu, G., Williams, R., Kreutz, T., Consonni, S., 2009. Co-production of synfuels and electricity from coal + biomass with zero net carbon emissions: an Illinois case study. *Energy Procedia*, 1(1): 4371-4378. DOI: <http://dx.doi.org/10.1016/j.egypro.2009.02.251>
- Lei, S., Zhang, J., 2009. An analysis of coal-to-oil industry's impact on environment. *Shenhua Science and Technology* 7(3), 84–88.
- Levary, R.R., 2007. Ranking foreign suppliers based on supply risk. *Supply Chain Management*, 12(6):392–394. DOI: <http://dx.doi.org/10.1108/13598540710826317>
- Li, Y.W., 2007. *Synfuels China and its Development in advanced CTL Process Technologies*. Presentation by Synfuels China LTD, 23 May 2007. Available from: [http://live.belfercenter.org/files/06-yongwang\\_li.pdf](http://live.belfercenter.org/files/06-yongwang_li.pdf)
- Liu, Z., Shi, S., Li, Y., 2010. Coal liquefaction technologies — development in China and challenges in chemical reaction engineering. *Chemical Engineering Science*, 65(1):12–17. DOI: <http://dx.doi.org/10.1016/j.ces.2009.05.014>
- Liu, P., Whitaker, A., Pistikopoulos, E.N., Li, Z., 2011. A mixed-integer programming approach to strategic planning of chemical centres: A case study in the UK. *Computers and Chemical Engineering*, 35(8): 1359-1373. DOI: <http://dx.doi.org/10.1016/j.compchemeng.2011.01.014>
- Lloyd's, 2010. *Sustainable energy security — strategic risks and opportunities for business*. Lloyd's of London white paper on sustainable energy security. See also: [http://www.lloyds.com/~media/Lloyds/Reports/360%20Energy%20Security/7238\\_Lloyds\\_360\\_Energy\\_Pages.pdf](http://www.lloyds.com/~media/Lloyds/Reports/360%20Energy%20Security/7238_Lloyds_360_Energy_Pages.pdf)
- Longwell, J.P., Rubin, E.S., Wilson, J., 1995. Coal: Energy for the future. *Progress in Energy and Combustion Science*, 21(4): 269–360. DOI: [http://10.1016/0360-1285\(95\)00007-0](http://10.1016/0360-1285(95)00007-0)
- Loomis, J., Quattlebaum, K., Brown, T., Alexander, S., 2003. Expanding institutional arrangements for acquiring water for environmental purposes: transactions evidence for the Western United States. *International Journal of Water Resources Development*, 19(1):21–28. DOI: <http://dx.doi.org/10.1080/713672720>
- Malhotra, R., 2005. *Direct coal liquefaction – lessons learned*. Paper presented at GCEP advanced coal workshop, Brigham Young University, Provo, USA, 16 March 2005. Available from: [http://gcep.stanford.edu/pdfs/RxsY3908kaqwVPacX9DLcQ/malhotra\\_coal\\_mar05.pdf](http://gcep.stanford.edu/pdfs/RxsY3908kaqwVPacX9DLcQ/malhotra_coal_mar05.pdf)
- Mantripragada, H., Rubin, E., 2009. CO<sub>2</sub>-reduction potential of coal-to-liquids (CTL) plants. *Energy Procedia*, 1(1):4331-4338. DOI: <http://dx.doi.org/10.1016/j.egypro.2009.02.246>
- Mantripragada, H., Rubin, E., 2011. Techno-economic evaluation of coal-to-liquids (CTL) plants with carbon capture and sequestration. *Energy Policy*, 39(5):2808–2816. DOI: <http://dx.doi.org/10.1016/j.enpol.2011.02.053>
- McCullum, D.L., Ogden, J.M., 2009. Future impacts of coal distribution constraints on coal costs. *Transportation Research Part E: Logistics and Transportation Review*, 45(3):460–471. DOI: <http://dx.doi.org/10.1016/j.tre.2008.09.011>
- Mielke, E., Anadon, L., Narayanamurti, V., 2010. *Water Consumption of Energy Resource Extraction, Processing, and Conversion - a review of the literature for estimates of water intensity of energy-resource extraction, processing to fuels, and conversion to electricity*. Discussion Paper 2010-15. BelferCenter. Available from: <http://belfercenter.ksg.harvard.edu/publication/20479/>
- Milici, R., 2009. Coal-to-Liquids: Potential Impact on U.S. Coal Reserves. *Natural Resources Research*, 18(2):85–94. DOI: <http://dx.doi.org/10.1007/s11053-009-9093-1>
- Myers, T., 2012. Potential contaminant pathways from hydraulically fractured shale to aquifers. *Groundwater*, 50(6), 872–882. DOI: <http://dx.doi.org/10.1111/j.1745-6584.2012.00933.x>
- National Energy Technology Laboratory, 2006. *Emerging issues for fossil energy and water*. Available from: <http://www.netl.doe.gov/technologies/oil-gas/publications/AP/IssuesforFEandWater.pdf>
- NONOX BV, 2007. Enhancements in the well to wheel path of natural gas, Multi Disciplinair Project Group 3, Eindhoven University of Technology, Department of Chemical Engineering and Chemistry. Available from <http://students.chem.tue.nl/ifp23/report.pdf>
- NRC, 2012. *Induced Seismicity Potential in Energy Technologies* (Prepublication), National Academies Press, 2012.
- National Petroleum Council, 2007. *Facing the Hard Truths about Energy and supplementary material: Topic Papers on GTL and CTL*. Report from July 2007. Available from: <http://www.npchardtruthsreport.org/>
- Nunez-Mata, D. 2010. *Evaluation Of Alternatives For Disposal And Monetization Of Associated Natural Gas – Offshore Deepwater Brazil*, Master Thesis, Mewbourne School Of Petroleum And Geological Engineering, University of Oklahoma (USA). Available at <http://mpge.ou.edu/research/documents/2010%20thesis/DANIEL%20NUNEZ%20MATA.pdf>
- NY Times, 2011. Natural gas's toxic waste, drilling down. The New York Times Series on natural-gas drilling. Accessed Aug 20, 2012
- Oke, A., Gopalakrishnan M., 2009. Managing disruptions in supply chains: A case study of a retail supply chain. *International Journal of Production Economics*, 118(1):168–174. DOI: <http://dx.doi.org/10.1016/j.ijpe.2008.08.045>
- Ogubue, C., Chukwu, G. and Khataniar, S. 2007. *Economics of GTL Technology for Gas Utilization*, Society of Petroleum Engineers - Hydrocarbon Economics and Evaluation Symposium, Dallas (Texas, USA), April 1-3, 107654-MS. Available from <http://www.onepetro.org/mslib/servlet/onepetropreview?id=SPE-107654-MS>
- Oil and Gas Eurasia 2009. *Flaring Up - Companies Pay High Costs To Be Green*, 4, April. Available at <http://www.oilandgaseurasia.com/articles/p/97/article/883/>
- Osborn, S., Vengosh, A., Warner, N., Jackson R., 2011. Methane contamination of drinking water accompanying gas-well drilling and hydraulic fracturing. Proceedings of the National Academy of Science, January, 2011.
- Palmer, M.A., Bernhart, E.S., Schlesinger, W.H., Eshleman, K.N., Foufoula-Georgiou, E., Hendryx, M.S., Likens, G.E., Loucks, O.L., Power, M.E., White, P.S., Wilcock, P.R., 2010. Mountaintop mining consequences. *Science*, 327(5962), 148–149. DOI: <http://dx.doi.org/10.1126/science.1180543>
- Panahi, M., Rafiee, A., Skogestad, S., Hillestad, M., 2012. A natural gas to liquids process model for optimal operation. *Industrial and Engineering Chemical Research*, 51(1), 425–433. DOI: <http://dx.doi.org/10.1021/ie2014058>

- Patel, B. 2005.** *Gas Monetisation: A techno-Economic Comparison of Gas-to-Liquid and LNG*, Foster Wheeler, Presented at 7th World Congress on Chemical Engineering, Glasgow. Available from [http://www.fosterwheeler.com/publications/tech\\_papers/files/ICHEM%20WCCCE%2005%20LNG%20versus%20GTL.pdf](http://www.fosterwheeler.com/publications/tech_papers/files/ICHEM%20WCCCE%2005%20LNG%20versus%20GTL.pdf)
- Purwanto, W. Mulia, Saputra, A., Thaib, A., Hanif, A., Yagus, A. 2005.** Gas-To-Liquids (GTL) as an option in monetizing stranded gas field. feasibility analyses using integrated process routes, Departemen Teknik Gas dan Petrokimia Fakultas Teknik Universitas Indonesia. Available from <http://www.docstoc.com/docs/90765442/GTL-for-Matindok-Gas-Fields-as-an-option>
- Rahmin I. 2008.** SPECIAL REPORT: GTL, CTL finding roles in global energy supply, *Oil & Gas Journal*, 196(12), March 24.
- Rahman, O. and Al-Maslamani, M. 2004.** *GTL: Is it an attractive route for monetization*, Society of Petroleum Engineers - Abu Dhabi International Conference and Exhibition, 10-13 October 2004, Abu Dhabi, United Arab Emirates, 88642-MS. Available from <http://www.onepetro.org/mslib/servlet/onepetroreview%3Fid%3D00088642%26soc%3DSPE>
- Rahman O. 2008.** Gas to Liquid (GTL): is it an attractive route for gas monetization? GTL vs. LNG Economics, *Egypt Oil and Gas Newspaper*, 13:10. Available from: [http://www.egyptoil-gas.com/read\\_article\\_issues.php?AID=143](http://www.egyptoil-gas.com/read_article_issues.php?AID=143)
- Ramdass, A. 2010.** *NIB's US\$ 10 World GTL Investment a con job*, Trinidad Express Newspapers, Trinidad Express Newspapers, September 23. Available from [http://www.trinidadexpress.com/news/NIB\\_s\\_US\\_10m\\_World\\_GTL\\_investment\\_\\_a\\_con\\_job\\_-103685499.html](http://www.trinidadexpress.com/news/NIB_s_US_10m_World_GTL_investment__a_con_job_-103685499.html)
- RAND, 2008.** *Producing liquid fuels from coal - prospects and policy issues*. Monograph prepared for the US Air Force and the National Energy Technology Laboratory of the US Department of Energy by RAND Corporation. Available from: <http://www.rand.org>
- Robertson, E. 1999.** *Options for gas-to-liquids technology in Alaska*, Idaho National Engineering and Environmental Laboratory, INEEL/EXT-99-01023, Prepared for the U.S. Department of Energy Office of Fossil Energy under DOE Idaho Operations Office Contract DE-AC07-99ID1372. Available from <http://www.inl.gov/technicalpublications/Documents/3318115.pdf>
- Robinson, K., Tatterson, D., 2008.** Economics on Fischer-Tropsch coal-to-liquids method updated. *Oil & Gas Journal*, 106(40):22-26.
- Rong, F., Victor, D.G., 2011.** Coal liquefaction policy in China: Explaining the policy reversal since 2006. *Energy Policy*, 39(12):8175–8184. DOI: <http://dx.doi.org/10.1016/j.enpol.2011.10.017>
- Sasol, 2002.** *Mind over matter - The Sasol Story: A half-century of technological innovation*. 176 p. Available from: <http://www.sasol.com>
- Sasol, 2005.** *Unlocking the potential wealth of coal*. Information brochure. Available from: <http://www.sasol.com>
- Schmitt, A., Singh, M., 2012.** A quantitative analysis of disruption risk in a multi-echelon supply chain. *International Journal of Production Economics*, 139(1):22-32. DOI: <http://dx.doi.org/10.1016/j.ijpe.2012.01.004>
- Simangunsong, E., Hendry, L.C., Stevenson, M., 2012.** Supply-chain uncertainty: a review and theoretical foundation for future research. *International Journal of Production Research*, 50(16): 4493–4523. DOI: <http://dx.doi.org/10.1080/00207543.2011.613864>
- Singh, A.R., Mishra, P.K., Jain, R., 2012.** Design of global supply chain network with operational risks. *International Journal of Advanced Manufacturing Technologies*, 60(1-4): 273–290. DOI: <http://dx.doi.org/10.1007/s00170-011-3615-9>
- Smyth, R., Narayan, P.K., Shi, H., 2012.** Inter-fuel substitution in the Chinese iron and steel sector. *International Journal of Production Economics*, 139(2): 525–532. DOI: <http://dx.doi.org/10.1016/j.ijpe.2012.05.021>
- SRES, 2000.** *Special Report on Emissions Scenarios*. Report by the Intergovernmental Panel on Climate Change (IPCC). Available from: <http://www.ipcc.ch/>
- Sovacool, B.K., Cooper, C., Parenteau, P., 2011.** From a hard place to a rock: Questioning the energy security of a coal-based economy. *Energy Policy*, 39(8):4664–4670. DOI: <http://dx.doi.org/10.1016/j.enpol.2011.04.065>
- Spath, P.L., Mann, M.K., Kerr, D.R., 1999.** *Life cycle assessment of coal-fired power production*. Report from National Renewable Energy Laboratory (NREL), NREL/TP-570-25119, June 1999. Available from: <http://www.nrel.gov/docs/fy99osti/25119.pdf>
- SSEB, 2006.** *American energy security - building a bridge to energy independence and to a sustainable energy future*. Report from the Southern States Energy Board (SSEB). Norcross, Georgia, July 2006. Available from: <http://www.americanenergysecurity.org/studyrelease.html>
- Steynberg, A.P., Nel, H.G., 2004.** Clean coal conversion options using Fischer-Tropsch technology. *Fuel*, 86(6):765–770. DOI: <http://dx.doi.org/10.1016/j.fuel.2003.09.023>
- Talberth, J., 2009.** *Economic feasibility of coal to liquids development in Alaska's interior*. Report prepared for the Northern Alaska Environmental Center. Available from: [http://www.sustainable-economy.org/main/send\\_client\\_files?f=CTL%2520Comments.pdf](http://www.sustainable-economy.org/main/send_client_files?f=CTL%2520Comments.pdf)
- Tavakoli, A., Sohrabi, M., Kargari, A., 2008.** Application of Anderson-Schulz-Flory (ASF) equation in the product distribution of slurry phase FT synthesis with nanosized iron catalysts. *Chemical Engineering Journal*, 136(2–3):358–363. DOI: <http://dx.doi.org/10.1016/j.cej.2007.04.017>
- Tijmensens, M., Faaij, A., Hamelinck, C., van Hardeveld, M., 2002.** Exploration of the possibilities for production of Fischer-Tropsch liquids and power via biomass gasification. *Biomass and Bioenergy*, 23:129–152. DOI: [http://dx.doi.org/10.1016/S0961-9534\(02\)00037-5](http://dx.doi.org/10.1016/S0961-9534(02)00037-5)
- Towill, D.R., Christopher, M., 2001.** The supply chain strategy conundrum ~ to be Lean or Agile or to be Lean and Agile. *Proceedings of the International Logistics Symposium*, Salzburg, 2001, 3–12.
- UKERC, 2009.** *Global oil depletion: an assessment of the evidence for a near-term peak in global oil production*. UK Energy Research Centre, London. Available from: <http://www.ukerc.ac.uk/>
- US Department of Energy, 2011.** *Shale gas production subcommittee second ninety day report*. Secretary of Energy Advisory Board, November 2011. Available from: <http://energy.gov/downloads/90-day-second-report-shale-gas-production-secretary-energy-advisory-board>
- US House, 2011.** *Chemicals used in hydraulic fracturing*. United States House of Representatives Committee on Energy And Commerce, April 2011.
- Vallentin, D., 2008.** Policy drivers and barriers for coal-to-liquids (CtL) technologies in the United States. *Energy Policy*, 36(8):3198–3211. DOI: <http://dx.doi.org/10.1016/j.enpol.2008.04.032>
- Velasco, J., Lopez, L., Velásquez, M., Boutonnet, M., Cabrera, M., Járas, 2010.** Gas to liquids: A technology for natural gas industrialization in Bolivia. *Journal of Natural Gas Science and Engineering*, 2(5), 222-228. DOI: 10.1016/j.jngse.2010.10.001
- Velocys. 2010.** Microchannel GTL Technology: Demonstration through to Commercialisation, smi Gas to Liquids 2010, Hilton London Kensington 27 – 28 October 2010. Available from [http://bdd30412c4435fb83871bb42c4abc74fdcc18bff.gripelements.com/downloads/oxfordcatalysts-velocys\\_gtl\\_update\\_oct10.pdf](http://bdd30412c4435fb83871bb42c4abc74fdcc18bff.gripelements.com/downloads/oxfordcatalysts-velocys_gtl_update_oct10.pdf)
- Velocys. 2011.** Media and Press Overview. Available from <http://velocys.com/ocgf01.php>
- Wang, P., Jin, L., Liu, J., Zhu, S., Hu, H., 2011.** Analysis of coal tar derived from pyrolysis at different atmospheres. *Fuel*, article in press. DOI: <http://dx.doi.org/10.1016/j.fuel.2010.06.041>
- Wei, H., Wong, C.W.Y., Lai, K., 2012.** Linking interorganisational trust with logistics information integration and partner cooperation under environmental uncertainty. *International Journal of Production Economics*, 139(2): 642–653. DOI: <http://dx.doi.org/10.1016/j.ijpe.2012.05.036>

- Williams, R., Larson, E., 2003.** A comparison of direct and indirect liquefaction technologies for making fluid fuels from coal. *Energy for Sustainable Development*, 7:79–102.
- Williams, R., Larson, E., Liu, G., Kreutz, T., 2009.** Fischer–Tropsch fuels from coal and biomass: Strategic advantages of once-through (“polygeneration”) configurations. *Energy Procedia*, 1(1):4379–4386. DOI: <http://dx.doi.org/10.1016/j.egypro.2009.02.252>
- Wood, D.A., Nwaoha, C., Towler, B.F., 2012.** Gas-to-liquids (GTL): A review of an industry offering several routes for monetizing natural gas. *Journal of Natural Gas Science and Engineering*, 9, 196–208. DOI: <http://dx.doi.org/10.1016/j.jngse.2012.07.001>
- Woods, T., Wilkinson P. and McGill, C., 2002.** *Meeting the Gas Supply Challenge of the Next 20 Years Non-Traditional Gas Sources*, Report prepared for the National Renewable Energy Laboratory -American Gas Foundation. Available at <http://www.gasfoundation.org/ResearchStudies/GasSupplyStudyNonTraditional1Final.pdf>
- World Coal Institute, 2006.** Coal: liquid fuels. Report from 2006. Available from: <http://www.worldcoal.org/>
- World Coal Association, 2012.** What is coal seam methane? Available from: <http://www.worldcoal.org/coal/coal-seam-methane>
- Wu, J., Wang J., Cheng, Q., DeVallance D., 2011.** Assessment of coal and biomass to liquid fuels in central Appalachia, USA, *International Journal of Energy Research*. 36(7):856–870. DOI: <http://dx.doi.org/10.1002/er.1838>
- Yang, J., Sun, Y., Tang, Y., Liu, Y., Wang, H., Tian, L., Wang, H., Zhang, Z., Xiang, H., Li, H., 2006.** Effect of magnesium promoter on iron-based catalyst for Fischer–Tropsch synthesis. *Journal of Molecular Catalysis A: Chemical*, 245(1-2):26–36. DOI: <http://dx.doi.org/10.1016/j.molcata.2005.08.051>
- Yurchak, S., 1988.** Development of Mobil's fixed-bed Methanol-to-Gasoline (MTG) process. *Studies in Surface Science and Catalysis*, 36, 251–272. DOI: [http://dx.doi.org/10.1016/S0167-2991\(09\)60521-8](http://dx.doi.org/10.1016/S0167-2991(09)60521-8)
- Zhang, Y., Xiang, W., Zhou, T., Lei, J., 2009.** The development of coal liquefaction: opportunities and challenges. *Coal Economy Research* 8:6–8 (in Chinese)

**APPENDIX 1. COAL-TO-LIQUIDS: main results of the economic and financial analysis reported in the reviewed studies.**

**Table 1. Published economic and financial feasibility for CTL plants (papers 1-6. Base case, if not differently specified).**

	Höök and Aleklett (2010)	Wu et al. (2011)	Williams et al. (2009) + Kreutz et al. (2008) [7 process configurations for FTL fuels production were analyzed]											
<b>Plant capacity (b/d)</b>	20,000-80,000	40,000	Large CTL RC V 50,000	Small CTL OT CCS 10,232	CBTL2 OT CCS 36,655	Large 10,232	Small 10,232	CBTL OT CCS 8,100						
<b>Base year for valuation</b>	2003\$-2008\$	2007\$	2009\$											
<b>Total Plant Cost -TPC (\$ billion)</b>	20,000 b/d: \$1.5 -\$4 ; 80,000 b/d: \$6-\$24	\$3.07	Large CTL RC V \$4.878	Small CTL OT CCS \$1.486	CBTL2 OT CCS \$4.617	Large \$1.555	Small \$1.379	CBTL OT CCS \$1.379						
<b>Specific TPC per b/d</b>	-	\$76,750	Large CTL RC V \$97,568	Small CTL OT CCS \$145,175	CBTL2 OT CCS \$125,946	Large \$151,976	Small \$151,976	CBTL OT CCS \$170,189						
<b>Break even crude oil equivalent price of FT liquids [\$ /b]</b>	Range: \$48-\$75/b (\$2008)	\$66/b	(ALL Base Case: Mature Industry): Large CTL RC V \$ /b: 56 63						Small CTL OT CCS V CCS 55 71	CBTL2 OT CCS Large Small 59 76	CBTL OT CCS 101			
	Talberth (2009)	Hatch (2008)	Larson et al. (2009) + Kreutz et al. (2008) [7 process configurations for FTL fuels production were analyzed]											
<b>Plant capacity (b/d)</b>	Case 1: 20,000 Case 2: 40,000	Case 1: 20,000 Case 2: 40,000 Case 3: 40,000 (with coal & gas)	RC-V 50,000	RC-CCS 50,000	OT -V 36,653	OT-CCS 36,652	OT- V 7,691	OT-CCS 7,692	OT CCS 13,039					
<b>Base year for valuation</b>	2008\$	2008\$	2007\$											
<b>Total Plant Cost -TPC (\$ billion)</b>	Case 1: \$6.9 Case 2: \$12.3	Case 1: \$4.146 Case 2: \$7.449 Case 3: \$4.655	RC-V \$4.878	RC-CCS \$4.945	OT -V \$4.407	OT-CCS \$4.597	OT- V \$1.245	OT-CCS \$1.281	OT CCS \$1.944					
<b>Specific TPC per b/d</b>	Case 1: \$345,000 Case 2: \$307,500	Case 1: \$207,300 Case 2: \$186,200 Case 3: \$116,400	RC-V \$97,568	RC-CCS \$98,908	OT -V \$120,239	OT-CCS \$125,434	OT- V \$161,870	OT-CCS \$166,577	OT CCS \$149,092					
<b>Break even crude oil equivalent price of FT liquids [\$ /b]</b>	<i>Not stated</i> Case 1: \$106/b Case 2: \$95/b (Computed dividing by 1.3 the FT liquid price)	<i>Not stated</i> Case 1: \$106/b Case 2: \$95 Case 3: \$83 (Computed dividing by 1.3 the FT liquid price)	(ALL Base Case: Mature Industry): RC-V \$53						RC-CCS \$59	OT -V \$35	OT-CCS \$50	OT- V \$72	OT-CCS \$89	OT CCS \$88

**Table 2. Published economic and financial feasibility for CTL plants (papers 7-11. Base case, if not differently specified)**

	DOE/NETL (2007)			Robinson & Tatterson (2008)						Berg et al. (2007)				
<b>Plant capacity (b/d)</b>	50,000 b/d			Range: 4,428 - 9,019 (Diesel only)						32,502 (bituminous coal) / 32,401 (lignite)				
<b>Base year for valuation</b>	2006\$			2008\$						2006\$				
<b>Total Plant Cost -TPC (\$ billion)</b>	\$ 4.528			Illinois no. 6: \$1.603 (best case) / \$2.404 (worst case) Montana subbituminous : 1) CTL (9019 b/d): \$ 1.850 2) IGCC (-): \$ 1.048 3) CTL + Power (4428 b/d): \$ 1.603 4) IGCC (4439 b/d) ultra-green: \$ 1.720						Bituminous coal with CCS: \$ 3.339 Bituminous coal with CCS and Power: \$ 3.602 Lignite coal with CCS: \$ 3.684				
<b>Specific TPC per b/d</b>	\$90,574			Illinois no. 6: \$362,014 (best case) Illinois no. 6: \$542,908(worst case) Montana subbituminous : 1) CTL: \$205,123 2) IGCC: 3) CTL +power : \$362,014 4) IGCC ultra green: \$382,817						Bituminous with CCS: \$102,732 Bituminous with CCS and 2X Power: \$110,823 Lignite coal with CCS: \$113,700				
<b>Break even crude oil equivalent price of FT liquids [\$ /b]</b>	\$61 (Base) ROI >10% if WTI > 37\$ ROI >15% if WTI > 47\$			Range: \$75 - \$135						Base (bituminous): \$56.02 (19% IRR) \$51.68 (17% IRR) Base (lignite) : \$58.46 (19% IRR) \$53.58 (17% IRR)				
<b>DOE/NETL (2009) [9 process configurations for FTL fuels production were analyzed]</b>												<b>Chen et al. (2011) + DOE/NETL (2007)</b>		
<b>Plant capacity (b/d)</b>	50,000 (CTL), 30,000 - 50,000 (CBTL), 5,000 (BTL)									50,000 b/d				
<b>Base year for valuation</b>	2008\$									2009\$				
<b>Total Plant Cost -TPC (\$ billion)</b>	100% coal no CCS 50k	100% coal CCS 50k	100% coal CCS+ATR 50k	8% bio CCS 50k	15% bio CCS 50k	30% bio CCS 30k	100% bio No CCS 5k	100% bio CCS 5k	100% bio CCS+ATR 5k	CTL without CCS: \$ 3.672 CTL with CCS: \$ 4.513				
<b>Specific TPC per b/d</b>	100% coal no CCS 50k	100% coal CCS 50k	100% coal CCS+ATR 50k	8% bio CCS 50k	15% bio CCS 50k	30% bio CCS 30k	100% bio No CCS 5k	100% bio CCS 5k	100% bio CCS+ATR 5k	CTL without CCS: \$73,440 CTL with CCS: \$90,260				
<b>Break even crude oil equivalent price of FT liquids [\$ /b]</b>	100% coal no CCS 50k	100% coal CCS 50k	100% coal CCS+ATR 50k	8% bio CCS 50k	15% bio CCS 50k	30% bio CCS 30k	100% bio No CCS 5k	100% bio CCS 5k	100% bio CCS+ATR 5k	CTL may become economic in regions such as China, India, Africa, and the USA in 2015, with the price of crude oil over \$91 (\$2010). In FSU and other Annex I countries during 2020-2025 with a C.O.P between \$105-\$118 (\$2010)				
	\$84	\$86	\$92	\$92	\$95	\$109	\$216	\$225	\$234					

**Table 3. Published economic and financial feasibility for CTL plants (papers 12-16. Base case, if not differently specified)**

	<b>Bartis et al. (2008) + Camm et al. (2008)</b>				<b>Erturk (2011)</b>		<b>NPC(07)+EIA(06) + SSEB (2006)</b>	
<b>Plant capacity (b/d)</b>	32,502						10,000 - 70,000	
<b>Base year for valuation</b>	2007\$				2007\$-2008\$		2006\$	
<b>Total Plant Cost -TPC (\$ billion)</b>	\$3.300–\$4.050				-		-	
<b>Specific TPC per b/d</b>	\$100,000 - \$125,000				\$100,000 -\$125,000 (USA) \$60,000 - \$62,000 (China)		\$60,000 - \$130,000	
<b>Break even crude oil equivalent price of FT liquids [\$/b]</b>	\$55 to \$65 (with 10% real RoR) / \$62 to \$75 (with 12% real RoR) [ Subbituminous coal is less expensive (- \$5). Lignite: requires increases in capital and operational costs who will offset the cost advantage]				-		\$34 - \$60	
	<b>Liu et al. (2009) + Kreutz et al. (2008)</b> <i>[16 process configurations for FTL fuels production were analyzed]</i>				<b>Mantripragada and Rubin (2011)</b> <i>[5 process configurations for FTL fuels]</i>			
<b>Plant capacity (b/d)</b>	CTL-RC-V 50,000	CBTL-RC-V 9,845	CBTL-OTA-CCS 10,882	BTL-RC-CCS 4,521	50,000 (Illinois#6 bituminous coal) (sensitivity: 10,000 to 125,000 b/d)			
	CTL-RC-CCS 50,000	CBTL-RC-CCS 9,845	CBTL-OTAS-CCS 17,669					
	CTL-OT-V 35,706	CBTL-OT-V 8,036	CBTL-OTS-CCS 13,213					
	CTL-OT-CCS 35,705	CBTL-OT-CCS 8,036	CBTL1-OT-CCS 8,036					
	CTL-OTA-CCS 35,705	CBTL-OTA-V 10,881	BTL-RC-V 4,521					
<b>Base year for valuation</b>	2007\$				2007\$			
<b>Total Plant Cost -TPC (\$ billion)</b>	CTL-RC-V \$4.852	CBTL-RC-V \$1.349	CBTL-OTA-CCS \$1.786	BTL-RC-CCS \$0.737	Liquids-only Co-production No CCS With-CCS No-CCS With-CCS-A With-CCS-B \$4.595 \$4.655 \$5.790 \$5.855 \$6.295			
	CTL-RC-CCS \$4.919	CBTL-RC-CCS \$1.369	CBTL-OTAS-CCS \$2.611					
	CTL-OT-V \$4.390	CBTL-OT-V \$1.372	CBTL-OTS-CCS \$1.955					
	CTL-OT-CCS \$4.574	CBTL-OT-CCS \$1.427	CBTL1-OT-CCS \$1.369					
	CTL-OTA-CCS \$4.826	CBTL-OTA-V \$1.720	BTL-RC-V \$0.724					
<b>Specific TPC per b/d</b>	CTL-RC-V \$97,040	CBTL-RC-V \$137,024	CBTL-OTA-CCS \$164,124	BTL-RC-CCS \$163,017	Liquids-only Co-production No CCS With-CCS No-CCS With-CCS-A With-CCS-B \$91,900 \$93,100 \$115,800 \$117,100 \$125,900			
	CTL-RC-CCS \$98,380	CBTL-RC-CCS \$139,055	CBTL-OTAS-CCS \$147,773					
	CTL-OT-V \$122,949	CBTL-OT-V \$170,732	CBTL-OTS-CCS \$147,960					
	CTL-OT-CCS \$128,105	CBTL-OT-CCS \$177,576	CBTL1-OT-CCS \$170,358					
	CTL-OTA-CCS \$135,163	CBTL-OTA-V \$158,074	BTL-RC-V \$160,142					
<b>Break even crude oil equivalent price of FT liquids [\$/b]</b>	CTL-RC-V \$58	CBTL-RC-V \$100	CBTL-OTA-CCS \$104	BTL-RC-CCS \$145	Liquids-only(*) Co-production(*) No CCS With-CCS No-CCS With-CCS-A With-CCS-B \$58.5 \$62.9 \$45 \$53.4 \$60.2 (**)\$68 \$62.9 \$58.6 \$56.5 \$60.5 (*)Not stated : Computed dividing by 1.3 the FT liquid price (**) 25\$/ton for CO <sub>2</sub>			
	CTL-RC-CCS \$65	CBTL-RC-CCS \$110	CBTL-OTAS-CCS \$88					
	CTL-OT-V \$44	CBTL-OT-V \$91	CBTL-OTS-CCS \$84					
	CTL-OT-CCS \$59	CBTL-OT-CCS \$110	CBTL1-OT-CCS \$93					
	CTL-OTA-CCS \$73	CBTL-OTA-V \$78	BTL-RC-V \$133					

**APPENDIX 2. GAS-TO-LIQUIDS: main results of the economic and financial analysis reported in the reviewed studies.**

**Table 4. Published economic and financial feasibility for GTL plants (papers 1-5)**

	Patel (2005)	Black (2010)	Balogun and Onyekonwu (2009)	Adedeji (2008)	Rahman (2008)
<b>Plant capacity (b/d)</b>	100,000	50,000	100,000	68,000	65,000
<b>Base year for valuation</b>	2005\$	2010\$	2009\$	2008\$	2008\$
<b>Total Plant Cost -TPC (\$ billion)</b>	\$2.5	\$1.5	\$2 - \$3		\$1.82
<b>Specific TPC per b/d</b>	\$25,000	Sensitivity analysis: \$20,000-\$45,000 Base: \$30,000	Range: \$20,000-\$30,000		\$28,000
<b>Break even crude oil equivalent price of FT liquids [\$ /b]</b>	\$22-23	\$22.29	Oil > US\$35/bbl Gas: US\$0.25-1.5/mmBtu	\$ 21.86	\$15-\$23
<b>COMMENTS</b>		Sensitivity analysis Oil Price: \$15 -\$90 Base:\$40	Simulation results show a 92.5% probability of the IRR being over 10%.The profitability of LNG and GTL is very close, with GTL having a potential superior return at high oil prices and preferable under conditions of limited capital.		

**Table 5. Published economic and financial feasibility for GTL processes (papers 6-10)**

	Chijemezu (2009)	NONOX BV (2007)	Castelo Branco et al. (2010)	Hossain and Gulen (2007)	Purwanto et al. (2005)
<b>Plant capacity (b/d)</b>			100,000 (offshore)	40,000	Range: 10,000 - 50,000 (optimal: 30,000-40,000)
<b>Base year for valuation</b>	2009\$	2007\$	2009\$	2006\$	2004\$
<b>Total Plant Cost -TPC (\$ billion)</b>				\$0.8 - \$1.4 - \$2	
<b>Specific TPC per b/d</b>				\$20,000 - \$35,000 - \$50,000	\$30,000 - \$60,000
<b>Break even crude oil equivalent price of FT liquids [\$ /b]</b>	\$65-\$102 [Computed dividing by 1.3 the FT liquids price]	\$21	the GTL plant is economically feasible without the need to consider the value of the carbon avoided, at \$85 /bbl	\$37 (but if NatGas costs \$6 Mmbtu, Oil price>\$70)	\$22
<b>COMMENTS</b>					NPV generally negative with small scale plants. In general, the impact of gas price is the most sensitive compare to other parameters. However, product price and plant capacity have also significant impacts. Integrated GTL with co-production approach has higher IRR than GTL standalone.

**Table 6. Published economic and financial feasibility for GTL processes (papers 11-15)**

	Velasco et al. (2010)+ Rahmin(2008) +Gradassi (2001)	Al-Shalchi (2006) + Woods et al. (2002)	Ogugbue et al. (2007)+ Robertson (1999)	Ang et al. (2010)+ Rahman and Al- Maslamani, (2004)	Bao et al. (2010)
<b>Plant capacity (b/d)</b>	100,000	100,000	100,000	65,000	118,000
<b>Base year for valuation</b>	2009\$	2006\$	2007\$	2010\$	2009\$
<b>Total Plant Cost -TPC (\$ billion)</b>		\$2	\$4		\$10.2
<b>Specific TPC per b/d</b>	Range: \$28,000 - \$140,000	\$20,000	\$40,000	\$25,000 - \$30,000	\$86,440
<b>Break even crude oil equivalent price of FT liquids [\$ /b]</b>	\$20 [from Dry (2004)]	\$18-\$20	\$23	\$20	\$45 (*)
<b>COMMENTS</b>		With oil price at 60\$ the max price for gas to make a GTL plant economic viable is between \$5 / \$6		-	The minimum plant capacity required to make profit is 57,000 bpd. (*) computed by dividing the FT liquid price by 1.3

**Table 7. Published economic and financial feasibility for GTL processes (papers 16-19)**

	Deutsche Bank (2010): Proposed Uzbekistan GTL	Deutsche Bank (2010): Proposed North America GTL	Economides (2005)	Chedid et al. (2007)
<b>Plant capacity (b/d)</b>	36,000	36,000	65,000	
<b>Base year for valuation</b>	2010\$	2010\$	2005\$	2006\$
<b>Total Plant Cost -TPC (\$ billion)</b>	\$2.5	\$2.25	\$1.625	
<b>Specific TPC per b/d</b>	\$69,444	\$62,500	\$25,000	\$28,000
<b>Break even crude oil equivalent price of FT liquids [\$ /b]</b>	\$ 45	\$70	NPV > 0 for oil price \$22/bbl, and \$1/MCF . NPV > 0 for oil price \$25/bbl, and \$1.5/MCF NPV > 0 for oil price \$20/bbl, and \$0.5/MCF	\$21.9
<b>COMMENTS</b>	Sensitivity analysis: Oil price (\$/bbl): a) 40 b) 60 c) 80 d)100 e)120. NPV million \$: a) 345 b)1117 c)2556 d)3989 e)5418 Gas cost (US\$/mmBtu) with US\$80/bbl oil: e) 1.5 f)2.6 g )3.6 h) 4.85 NPV million \$: e)2,556 f)1,721 g)959 h) 0	IRR and NPV have a much higher sensitivity to gas prices, differently from the Uzbekistan GTL project, where the key variable is basically the oil price.	At a price of oil equal to \$30 per barrel, a natural gas price of \$4 per MCF or higher would render LNG more attractive; a lower price of gas would make GTL more attractive. At \$50 per barrel, this breakdown is \$6 per MCF. Conversely, if the price of natural gas is maintained below \$3 per MCF, then any price of oil above \$20 would render GTL more attractive.	Sensitivity analyses changing the following parameters: a) Diesel incremental cost over CO. b) Feedstock NG price c) O&M cost. d) GTL plant capital cost. -> IRR found to vary in the range 14–17%.

**APPENDIX 3. Economics of real GTL plants (first 7 rows) and indicative economics of small scale GTL plants manufacturers (lower 7 rows)**

	<b>REAL: Shell Pearl QATAR</b>	<b>REAL: SASOL Oryx, QATAR</b>	<b>REAL: CHEVRON (75%) /Nigerian National Petroleum Corporation (NNPC,15%)/SASOL(10%) Escravos, NIGERIA</b>
<b>Plant capacity (b/d)</b>	140,000	34,000	34,000
<b>Base year for valuation</b>	2010\$	2009\$	2011\$
<b>Total Plant Cost -TPC (\$ billion)</b>	(original budget: \$6) Final: \$19 (*)	(original budget: \$0.95) Final: \$1.1 (*)	(original budget: 2.7) Latest: \$8.4 (*)
<b>Specific TPC per b/d</b>	\$136,000	\$32,350	\$247,000
<b>Break even crude oil equivalent price of FT liquids [\$ /b]</b>	\$40 (**)	\$40 (**)	
<b>COMMENTS</b>	<a href="http://www.upstreamonline.com/live/article204485.ece">(*) Reed and Tuttle (2010)</a> <a href="http://www.upstreamonline.com/live/article204485.ece">(**) http://www.upstreamonline.com/live/article204485.ece</a>	<a href="http://www.gasstrategies.com/node/74017">(*) Magill (2011)</a> <a href="http://www.gasstrategies.com/node/74017">(**) http://www.gasstrategies.com/node/74017</a>	<a href="#">(*) Reddall (2011)</a>
	<b>VELOCYS (2010-2011)</b> <b>[Official indicative economics (*)]</b>	<b>COMPACTGTL (2011)</b> <b>[Official indicative economics (*)]</b>	<b>Nunez Mata (2010)</b> <b>+VELOCYS (2010)+CompactGTL(2010)</b> <b>for Brazilian Offshore oil plant</b>
<b>Plant capacity (b/d)</b>	500 - 5,000 bbl/d	500 - 2,000 bbl/d	1,000 (low cost case) - 2,000 (high cost case)
<b>Base year for valuation</b>	2010\$ and \$2011\$		2010\$
<b>Total Plant Cost -TPC</b>		\$ 50 million (incremental capex)	\$ 100 million (low cost case) \$ 300 million (high cost case)
<b>Specific TPC per b/d</b>	\$12,000 to \$16,000 (only the FT unit) \$44,000 to \$53,000 for the natural gas reforming, syngas conditioning prior to the FT unit and remaining CAPEX		100,000 (low cost) - 150,000 (high cost)
<b>Break even crude oil equivalent price of FT liquids [\$ /b]</b>		Pre-Tax Incremental Oilfield NPV \$ 150 million with oil price at \$75 /barrel	Oil prices > \$100 (for 1,000 bpd plant) "The cost of the GTL module would need to decrease about 50% (to 40 - 60 \$ mln range) to be able to breakeven at \$70 /bbl, and an average of 25% to breakeven at \$ 90 /bbl."
<b>COMMENTS</b>	This is a company which has started the commercialization of its products based on Microchannel GTL only recently and which is still conducting tests worldwide. Any costs and data reported in the official documentations is therefore it be considered only as indicative. We thank Velocys Inc. for the active collaboration.	This is a company which has started the commercialization of its products based on Microchannel GTL only recently and which is still conducting tests worldwide. Any costs and data reported in the official documentations is therefore it be considered only as indicative. We thank CompactGTL for the active collaboration.	NPV negative for all scenarios considered. "Contrary to the expectation, NPV for both GTL options decrease with higher volumes, which indicate that higher revenue stream is not enough to pay for the required additional infrastructure"

